



Parallels Remote Application Server

RAS Reporting Guide

17.1

Parallels International GmbH
Vordergasse 59
8200 Schaffhausen
Switzerland
Tel: + 41 52 672 20 30
www.parallels.com

© 2021 Parallels International GmbH. Parallels and the Parallels logo are trademarks or registered trademarks of Parallels International GmbH in Canada, the U.S., and/or elsewhere.

Apple, Safari, iPad, iPhone, Mac, macOS, iPadOS are trademarks of Apple Inc. Google and Google Chrome are trademarks of Google LLC.

All other company, product and service names, logos, brands and any registered or unregistered trademarks mentioned are used for identification purposes only and remain the exclusive property of their respective owners. Use of any brands, names, logos or any other information, imagery or materials pertaining to a third party does not imply endorsement. We disclaim any proprietary interest in such third-party information, imagery, materials, marks and names of others. For all notices and information about patents please visit <https://www.parallels.com/about/legal/>

Contents

Introduction	4
Parallels RAS 17 Release History	4
Installing Parallels RAS Reporting	5
System Requirements	5
Install Microsoft SQL Server	7
Configure Microsoft SQL Server Reporting Services.....	7
Install Parallels RAS Reporting.....	8
Running Parallels RAS Reports	10
GDPR Compliance.....	12
Creating Custom Reports	14
Requirements and Information	14
Enable Custom Reports in the RAS Console	15
Install Microsoft SQL Server Report Builder	16
Create a New Blank Report.....	16
Add a Data Source	18
Add a Dataset	20
Design the Report	22
Run the Report in the RAS Console	24
Summary	25
Example: Report with Charts.....	25
Create a New Report.....	26
Add a Dataset	26
Design the Report	26
RAS Reporting Database Schema.....	46
Index	49

CHAPTER 1

Introduction

This guide describes how to use Parallels® RAS Reporting. The first part of the guide describes how to install and configure Parallels RAS Reporting and then view predefined reports in the Parallels RAS Console. The second part explains how to create your own custom reports using Microsoft SQL Server Report Builder.

In This Chapter

Parallels RAS 17 Release History..... 4

Parallels RAS 17 Release History

The following table lists the Parallels RAS 17 release history. Parallels RAS documentation is updated for every release. This guide refers to the latest Parallels RAS 17 release from the table below. If you are using a newer Parallels RAS release or version, please download the current version of the guide from <https://www.parallels.com/products/ras/resources/>

Parallels RAS Version	Release	Date
17.0	Initial release	7/23/2019
17.1	Initial release	12/9/2019
17.1	Update 1	3/19/2020
17.1	Update 2	7/16/2020
17.1	Hotfix	9/15/2020
17.1	Update 3	3/26/2021

CHAPTER 2

Installing Parallels RAS Reporting

This chapter describes how to install and configure Parallels RAS Reporting. If you already have Parallels RAS Reporting installed, you may skip this chapter and proceed to **Creating Custom Reports** (p. 14).

In This Chapter

System Requirements	5
Install Microsoft SQL Server	7
Configure Microsoft SQL Server Reporting Services	7
Install Parallels RAS Reporting	8
Running Parallels RAS Reports	10
GDPR Compliance	12

System Requirements

Operating System requirements

Parallels RAS Reporting can be installed on a server running one of the following Windows Server versions:

- Windows Server 2019
- Windows Server 2016
- Windows Server 2012 R2
- Windows Server 2012
- Windows Server 2008 R2
- Windows Server 2008

.NET Framework 3.5 and .NET Framework 4.5 or higher must be installed.

Microsoft SQL Server requirements

Parallels RAS Reporting can be used with the following Microsoft SQL Server versions:

- Microsoft SQL Server 2019
- Microsoft SQL Server 2017

- Microsoft SQL Server 2016
- Microsoft SQL Server 2014
- Microsoft SQL Server 2012
- Microsoft SQL Server 2008 R2 SP1
- Microsoft SQL Server 2008 SP1

Beginning with RAS 17.1, SQL Server Reporting Services (SSRS) and the SQL Server database engine can be deployed on separate hosts.

Using Microsoft SQL Server 2017 and 2019

Microsoft SQL Server 2017 and 2019 allow you to install the database engine and SQL Server Reporting Services (SSRS) on different hosts. Parallels RAS 17.1 (and newer) supports this deployment scenario and gives you the ability to use SQL Server Reporting Services and the SQL Server database engine installed on separate hosts.

Installation locations

RAS Reporting must be installed on the same server where SQL Server Reporting Services are running. Please note that if you have SSRS and the database engine installed on different hosts, RAS Reporting must be installed where the SSRS are installed.

The following table contains RAS and SQL Server version compatibility information and locations where components necessary to use RAS Reporting can be installed:

RAS Reporting version	SSRS version	SQL Server version	Installation locations
17.1, 18.0	2019	2019	SSRS - same host as RAS Reporting SQL Server - can be a different host
17.1, 18.0	2017	2019	SSRS - same host as RAS Reporting SQL Server - can be a different host
17.1, 18.0	2017	2019	SSRS - same host as RAS Reporting SQL Server - can be a different host
17.1, 18.0	2017	2017	SSRS - same host as RAS Reporting SQL Server - can be a different host
17.1, 18.0	2017	2016	SSRS - same host as RAS Reporting SQL Server - can be a different host
17.0, 18.0	2008 R2 - 2016	2008 R2 - 2016	SSRS and SQL Server on the same host

Microsoft SQL Server must be installed as a named instance (not default or unnamed instance), because an instance must have a name for RAS Reporting to work. You can specify an instance name when you install Microsoft SQL Server (or when you create a new SQL Server instance in a multi-instance scenario). For complete details, please read the **Install Microsoft SQL Server** section that follows this one.

Install Microsoft SQL Server

Note: For Parallels RAS installations running on multiple servers, it is recommended that Microsoft SQL Server is installed on a dedicated server.

In this section:

- Install Microsoft SQL Server 2016 or earlier
- Install Microsoft SQL Server 2017 or 2019

Configure Microsoft SQL Server Reporting Services

To configure Microsoft SQL Server Reporting Services, follow these steps:

- 1 Run the Reporting Service Configuration Manager (**Start > Apps > Microsoft SQL Server 2016 > Reporting Services Configuration Manager**).
- 2 In the **Reporting Services Configuration Connection** dialog that opens, do the following:
 - Make sure the **Server Name** field contains the name of the server hosting the SQL Server instance.
 - Make sure the **Report Server Instance** field contains the name of the SQL Server instance that you've created earlier. If you used the default Parallels RAS name, it will appear as "RASREPORTING". If you used a different instance name, select that name.
- 3 Click **Connect**. If the connection is successful, the **Reporting Services Configuration Manager** window opens.
- 4 Select the **Web Service URL** category (not to be confused with Web Portal URL) in the left pane and set the following properties in the right pane:
 - **Virtual Directory:** Make sure that the directory name is "ReportServer_RASREPORTING". If you used a different name for the SQL Server instance, you should see that name instead of the "RASREPORTING" part.
 - **TCP port:** Set the port number to 8085.
- 5 Click the **Apply** button to apply the settings.
- 6 Select the **Web Portal URL** category in the left pane and then do the following:

- Make sure that the **Virtual Directory** field is set to "Reports_<InstanceName>", where "InstanceName" is the name of your SQL Server instance. The default Parallels RAS name would be "Reports_RASREPORTING".
 - Examine the **URLs** field. Make sure that the port number after the server name is 8085. If it's not, click the **Advanced** button and change the port number.
- 7 Verify that you can access the Reporting Services Web Portal by clicking the URL on the **Web Portal URL** page. This should open the SQL Server Reporting Services home page in a web browser.
 - 8 Click **Exit** to close the Reporting Services Configuration Manager.

Install Parallels RAS Reporting

To install Parallels RAS Reporting:

- 1 Log in to the server where you have Microsoft SQL Server Reporting Services installed. Make sure you use the account with administrative privileges (AD).

Note: As was mentioned earlier, SQL Server 2017 and newer allow you to install SQL Server database engine and SQL Server Reporting Services (SSRS) on different hosts. You need to be logged in to the server where you have SSRS installed.

- 2 Download the latest version of Parallels RAS Reporting from <https://www.parallels.com/products/ras/download/links/>
- 3 Once downloaded, double-click the RASReporting-xxx.msi file to run the installation wizard.
- 4 Click **Next** when prompted. Review and approve the end-user license agreement and click **Next**.
- 5 On the **Database connection** page, specify the SQL Server database engine location:
 - **Location:** If the SQL Server database engine is installed on the local server (together with SSRS), select **Localhost**. If the SQL Server is installed on a different server, select **Remote** and then specify the server connection properties (see below).
 - **Server:** If you selected **Remote**, specify the FQDN or IP address of the server where you have SQL Server installed.
 - **Username:** Specify the username to log in to SQL Server.
 - **Password:** Specify the password.
- 6 On the same page, specify the SQL Server instance name. The default instance name is RASREPORTING. If you would like to use a different instance, you can specify it on this page. If the instance doesn't exist, you need to create it first.
- 7 Click **Next**.

- 8 On the **Viewing Reports User** page, you need to specify an Active Directory user who will be granted permissions to access the RAS reporting database. The default user is "rasreportingview" (note that the user must be created in Active Directory before it can be used here). You can specify a different Active Directory user if you wish, but you will need to change the reporting settings in the RAS Console before you can view reports (this change is described later in this chapter when the RAS reporting configuration is explained).
- 9 Click **Next** to install Parallels RAS Reporting.

Configure RAS Reporting in the RAS Console

To configure Parallels RAS Reporting:

- 1 Log in to the Parallels RAS Console.
- 2 Select the **Administration** category and click the **Reporting** tab in the right pane.
- 3 In the **Reporting** tab, select the **Enable RAS Reporting** option.
- 4 In the **Server** field, specify the FQDN or IP address of the server hosting your SQL Server instance. The value in the **Port** field is used by the service which receives data from the RAS Publishing Agent. The default port is 30008.
- 5 Specify a user login option by selecting one of the following:
 - **Prompt user for login details** — If this option is selected, the Parallels RAS Console user will be prompted to enter credentials before they can run a report.
 - **Use following credentials** — If this option is selected, the specified username and password will be used. The default (built-in) user name is RASREPORTINGVIEW. If you specified a different user when you installed RAS Reporting, specify that user credentials here.
- 6 To test the database connection, click the **Test connection** button.

Configure advanced settings

These settings are optional, so you can configure them according to your needs.

To access advanced settings:

- 1 On the **Administration > Reporting** tab page, click the **Tracking Settings** button. The **Advanced Setting** dialog opens.
- 2 In the **Session Information** section, specify the following options:
 - **Enable Tracking**. Records sessions data (affects all reports except server reports).
 - **Retain information for**. Select for how long the information should be kept in the database.
- 3 In the **Server Counters Information** section, specify the following:
 - **Enable Tracking**. If selected, server counter data is recorded (affects server reports only).
 - **Retain information for**. Select for how long the information should be kept in the database.

- **Track CPU / Memory counter when change is more than (%)**. Use these two options to set the minimum CPU and Memory resource usage required to record data.
- 4 The **Custom reports** section is used to enable custom reports in the Parallels RAS Console. Select the **Enable custom reports** option and specify a folder name where custom reports will be stored (or use the default "Custom reports" name). Note that this is a virtual folder located on the SQL Server Reporting Services side, so you need to specify just a name (not a traditional path). You will see the folder in the Parallels RAS Console in the **Reporting** category together with other (predefined) folders that contain reports. Custom reports are described in detail in the **Creating Custom Reports** chapter (p. 14).

Running Parallels RAS Reports

To view Parallels RAS reports, select the **Reporting** category in the RAS Console. The report information is displayed as follows:

- The middle pane lists the available reports. See the **Predefined reports** subsection below for the complete list. The blue "folders" icon (at the top of the list) groups reports by type or displays all of them as a flat list. The "refresh" icon refreshes the report list by retrieving it from the database (this can be useful when you enable/disable the reporting functionality or when you add custom reports, which may not appear in the list automatically).
- When you initially open the **Reporting** category, the right pane contains just the **Information** tab page, which informs you whether Parallels RAS Reporting is active. If it's not, you need to make sure that it is installed and enabled. See **Install Parallels RAS Reporting** (p. 8) for details.
- The blue "square" icon in front of the **Tasks** drop-down menu (upper right-hand side of the RAS Console) expands the reporting interface into full screen. The **Tasks** drop-down menu allows you to perform the following actions: **Duplicate** (duplicates a report tab page), **Full screen** (on/off), various **Close Report** options, **Delegate Permissions** (allows you to grant permissions to view reports to other RAS administrators, such as Power and Custom administrators who don't have these rights).

To run a report, double-click it in the middle pane. The report opens in a tab page in the right pane:

- Most of the predefined reports include controls that you can interact with, such as **From/To** dates, **Sort By**, **Sort Order**, **Chart Type**, **Server Name**, and others depending on the report type. When you change a value in any of these controls, click the **View Report** button to apply the new values/options and re-run the report.
- The main report area (lower portion where the data is represented as a graph, text, or numbers) includes a menu bar with icons that allow you to change the magnification, list through report pages (if more than one is included), search for text, save a report to a file, print a report, and export it to one of the available formats (Word, Excel, PowerPoint, PDF, or a data feed).

Note: The first time the reports are viewed, you may be requested to add <http://<server domain/ IP>> as a trusted website. This will appear depending on the Parallels RAS machine's Internet Explorer Enhanced Security Configuration.

Predefined reports

Parallels RAS Reporting includes the following predefined reports grouped by functionality:

- 1 User Reports.** This group includes reports about how end users are interacting with Parallels RAS:
 - **User Activity** — shows all sessions produced by all users in the system. The report shows information about each session and includes active time, idle time, and disconnected time.
 - **User Session Activity** — shows all sessions produced by a single user. The report shows information about each session and includes active time, idle time, and disconnected time.
 - **Application Usage by User** — shows applications used by a specified user, including number of times used and total time.
 - **Devices Used by User** — shows information about devices used by a user. The report includes information such as device vendor, device model, and total time used.
 - **Client Operating System Used by User** — shows the operating system being used by a specified user.
 - **Full User Information** — shows detailed information about a specified user.
- 2 Group Reports.** These reports obtain information about how groups of users are interacting with Parallels RAS:
 - **Groups Activity** — shows all sessions produced by all groups in the system. The report includes active, idle, and disconnected time.
 - **Group Sessions Activity** — shows all sessions produced by a group in the system. The report shows information about each session produced by each user in the group and includes start, end, active, idle, disconnect and total time.
 - **Applications Used by Group** — shows applications used by a specified group, including number of times used and total time.
 - **Devices Used by Group** — shows information about devices used by users as members of a specified group. The report includes device vendor, model and total time used.
 - **Client Operating System Used by Group** — shows the operating system used by members of a particular group.
- 3 Devices Reports.** This group includes reports about the devices that are connecting to Parallels RAS:
 - **Devices Used** — shows all devices using the system. The report includes a device manufacturer, model, and the number of sessions opened by the device.
 - **Client Operating System Used** — shows devices and corresponding operating systems that are using the system.
 - **Parallels Client Version Used** — shows information about a device model, Parallels Client version used, and session information.

- 4 Server Reports.** This group includes reports about the activity of Parallels RAS server components:
- **Sessions Activity on Server** — shows the session activity of users on a particular server. Report includes start, end, active, idle and disconnect time.
 - **Farm Health by Server** — shows server CPU and RAM usage for a specified server in the farm.
 - **Farm Health by Machine** — shows server CPU and RAM usage for a specified computer.
 - **Gateway Tunnelled Sessions** — shows tunneled session information for a specified Gateway.
- 5 Application Reports.** Reports related to applications.
- **Applications Usage** — shows information about applications used in the system. Report includes information such as application name, number of times used and the total usage time. When viewing this report, select "All applications" or "RAS published applications" depending on your needs. When the second option is selected, the report will not include non-published applications and duplicates.

Custom reports

If you have enabled the Custom Reports functionality (**Administration > Reporting > Tracking settings > Enable custom reports**), you will also see the custom reports group with a single demo report in it. As you add more custom reports, they will all appear in this folder. When the Custom Reports functionality is disabled, this group is not shown in the report list. Custom reports are described in detail in the **Creating Custom Reports chapter** (p. 14).

GDPR Compliance

The Parallels RAS reporting database contains information about users, which may possibly include personal user information. To conform to GDPR, Parallels RAS gives you the ability to clear user data from the database at any time. **Parallels RAS Reporting Tools** is a simple application that you can use to perform this task. The tool is installed automatically when you install Parallels RAS.

To clear user data:

- 1** On the computer where you have Parallels RAS installed, navigate to `C:\Program Files (x86)\Parallels\RAS Reporting`.
- 2** In the folder specified above, locate and run the **RASReportingTools** application.
- 3** When the application starts, enter a user name in the **User data** field and click **Find user**. If the user is found, the user information is displayed. If the user is not found, it means that the RAS reporting database doesn't have any information about that user.

- 4 To see the user information contained in the RAS reporting database, click the **Show full user information** button. This will open the **Full User Information** report in a web browser (note that this report is also available in the **Reporting** category in the RAS Console). Examine the report to determine if any of the user information is subject to GDPR requirements.
- 5 To clear the user data, go back to the **Parallels RAS Reporting Tool** app and click the **Clear user data** button. When asked, confirm that you want to clear the data.

CHAPTER 3

Creating Custom Reports

This chapter describes how to create your own custom reports using Microsoft SQL Server Report Builder and then run the reports in the Parallels RAS Console.

In This Chapter

Requirements and Information.....	14
Enable Custom Reports in the RAS Console	15
Install Microsoft SQL Server Report Builder	16
Create a New Blank Report.....	16
Add a Data Source.....	18
Add a Dataset	20
Design the Report	22
Run the Report in the RAS Console.....	24
Summary	25
Example: Report with Charts.....	25

Requirements and Information

Target Audience

- IT professionals, such as server, network, and system administrators familiar with Microsoft SQL Server environments.
- Existing RAS administrators.

Prerequisites

- Experience administering a Parallels RAS Farm.
- Experience querying databases using Transact-SQL or Microsoft SQL Server Management Studio.

The Parallels RAS Reporting component must be installed and configured in order to use the information provided in this chapter. See **Install Parallels RAS Reporting** (p. 5).

You can also find some additional information in the following KB article about Parallels RAS custom reports: <https://kb.parallels.com/en/124648>

Enable Custom Reports in the RAS Console


Note: Microsoft SQL Server Reporting Services and Parallels RAS Reporting must be installed and configured before you can perform any of the tasks described here and later in this chapter. For complete installation instructions, please see **Install Parallels RAS Reporting** (p. 5).

Before you create custom reports, you need to enable the Custom Reports functionality in the RAS Console. Initially, this will perform one important action, it will create a virtual folder on the SQL Server Reporting Services side for storing your custom reports and will display it in the RAS Console together with the predefined folders.

To enable custom reports:

- 1 In the RAS Console, navigate to **Administration > Reporting**.
- 2 Make sure that the RAS Reporting is enabled and configured.
- 3 Click the **Tracking settings** button.
- 4 In the dialog that opens, select the **Enable custom reports** option (at the bottom) and specify a folder name, or use the default name "Custom reports". The folder will appear on the **Reports** list in the **Reporting** category.
- 5 Click **OK** and then click the **Apply** button in the RAS Console.

The virtual folder for storing custom reports will be created on the SQL Server Reporting Services side. To view it in the RAS Console, select the **Reporting** category and click the "Refresh" icon. If you see individual reports (not folders) click the "Folders" icon at the top of the **Reports** pane. The "Custom reports" folder will appear in the list. By default, the folder contains a single sample report.

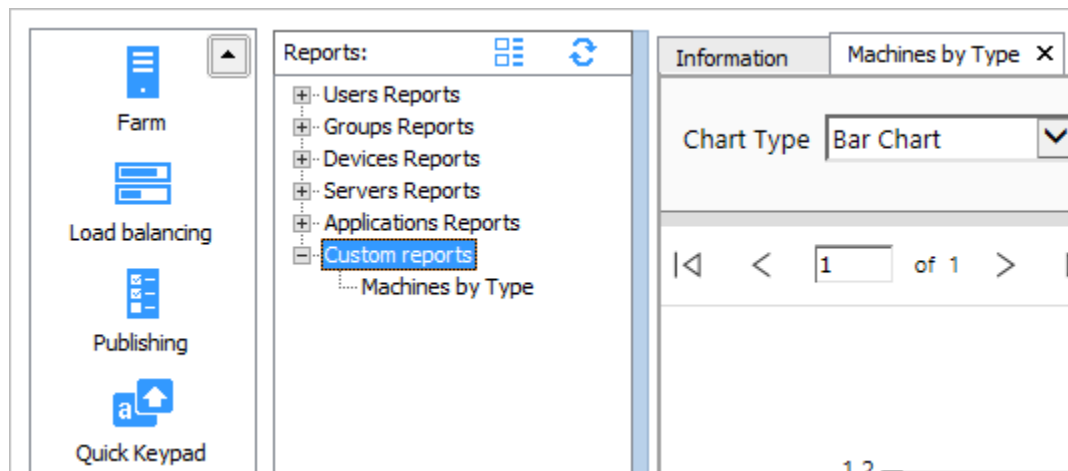

Managing custom reports in SQL Server Report Manager

To view the "Custom reports" virtual folder in the SQL Server Report Manager, open the following URL in a web browser:

```
http://[server-name]:8085/Reports_RASREPORTING
```

where [server-name] is the name or IP address of the server where you have the SQL Server instance installed. The "RASREPORTING" part is the SQL Server instance name. If you used a different name when you installed the instance, use that name instead of "RASREPORTING".

The SQL Server Report Manager allows you to view and manage virtual folders and reports that they contain. You can download or upload reports as files to/from your local file system, set a report data source, and perform some other tasks. We will talk about some of these tasks later in this chapter.

Install Microsoft SQL Server Report Builder

To create your own reports, you need to download and install Microsoft SQL Server Report Builder.

Note: In order to avoid compatibility issues, we suggest using a Report Builder version that corresponds to the Microsoft SQL Server version that you are using.

To install Report Builder:


- 1 Run the Report Builder installation wizard.
- 2 When asked to enter the **Default target server URL (optional)**, leave the field blank (you will specify it later).
- 3 Click **Next** and then click **Install** to begin the installation.
- 4 Click **Finish** when the installation completes.

Create a New Blank Report


To create a new report:

- 1 Open Report Builder (**Start > Apps > Microsoft SQL Server Report Builder > Report Builder**).

- 2 In the **Getting Started** dialog, select **New Report** and then click **Blank Report**.

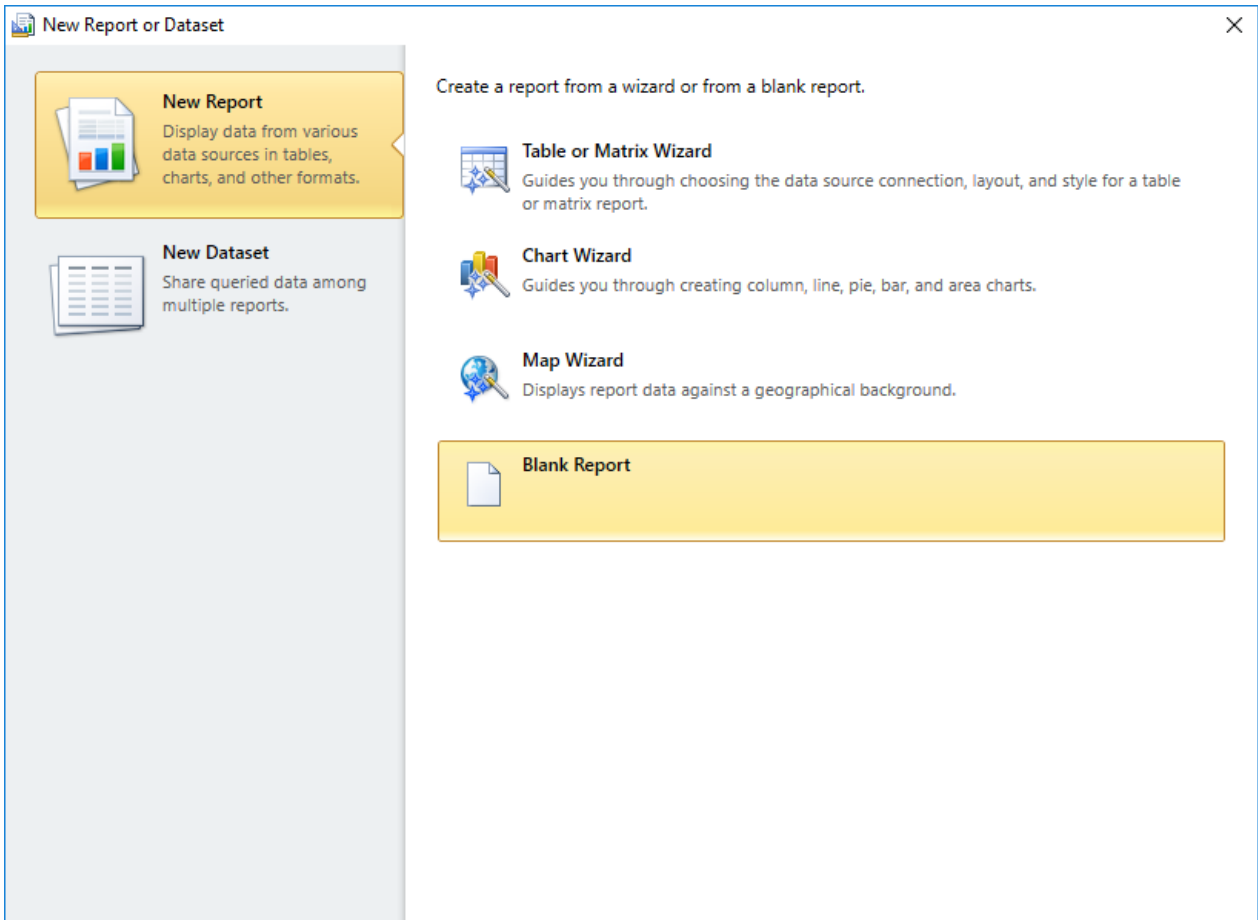

- 3 The main Report Builder window opens.
- 4 In the lower left-hand corner of the window, it should say, "No current report server. Connect".




- 5 Click the **Connect** link and then enter the Report server URL using the following format:
`http://[server-name]:8085/ReportServer_RASREPORTING`
 where [server-name] is the name or IP address of the server where you have the SQL Server instance installed. The "RASREPORTING" part is the SQL Server instance name. If you used a different name when you installed the instance, use that name instead of "RASREPORTING".
- 6 Click **Connect**. The Report Builder will connect to the report server and will display the server URL in the lower left-hand corner of the window.

Add a Data Source


You now need to create a data source for your report. A data source contains the database connection properties, authentication method, and some other instructions.

To create a data source:


- 1 In the Report Builder, right-click on **Data Sources** in the left pane and then click **Add Data Source**.

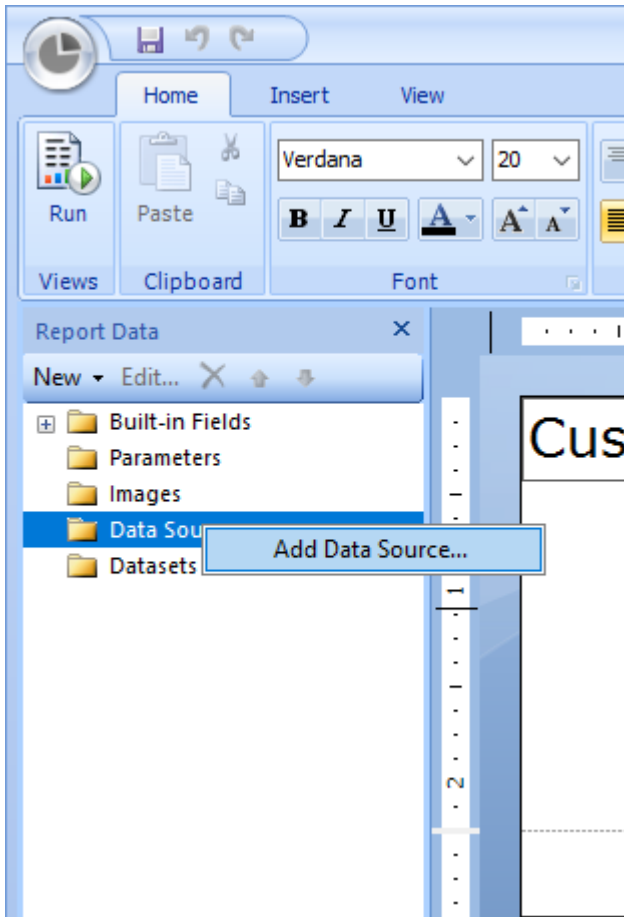

- 2 In the **Data Source Properties** dialog, type a name for the data source and then select the **Use a shared connection or report model** option. The other option ("Use a connection embedded in my report") allows you to specify the connection string manually, but since Parallels RAS Reporting already has the shared connection source defined, we'll use the first option instead.

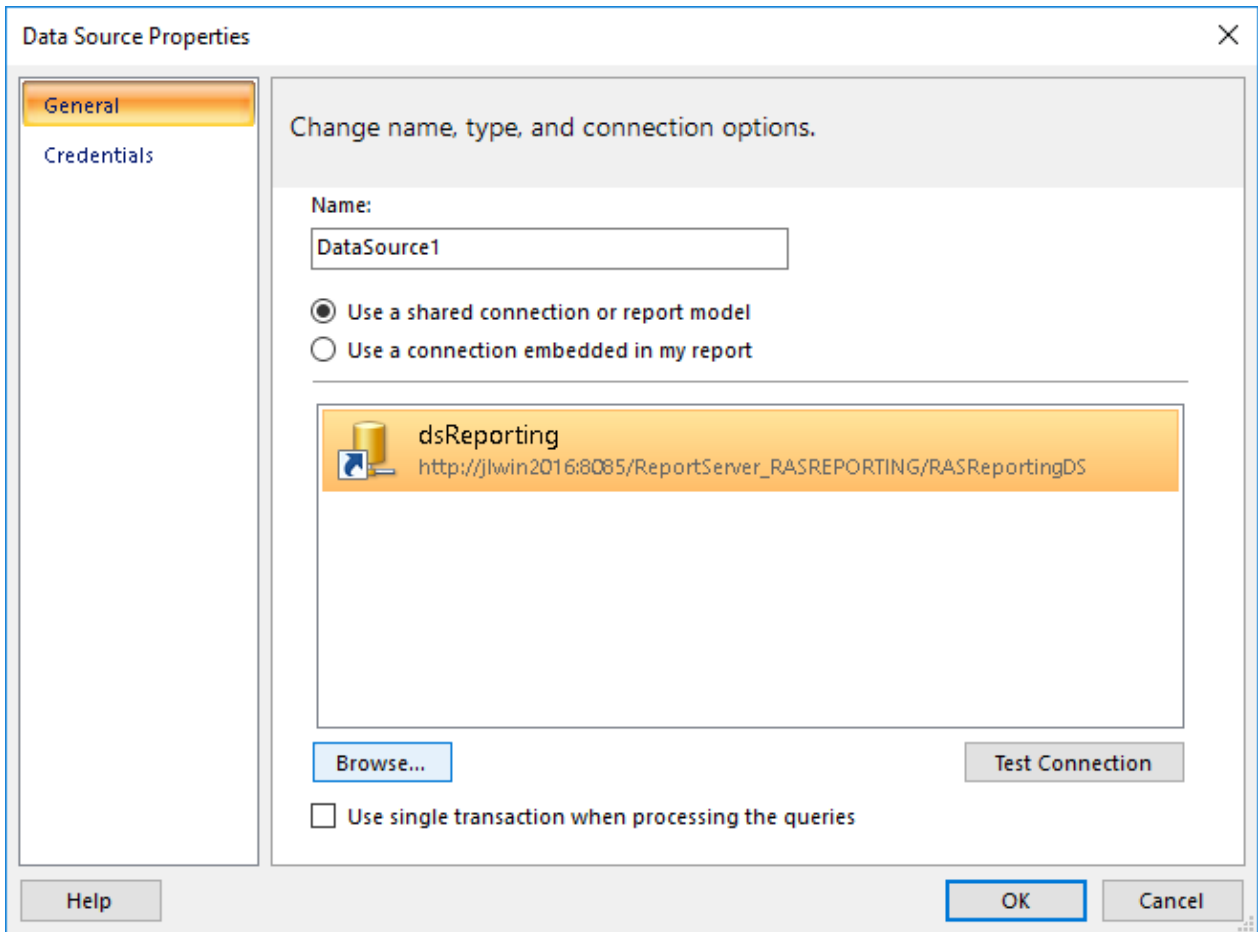

- Click the **Browse** button. The **Select Data Sources** dialog opens:

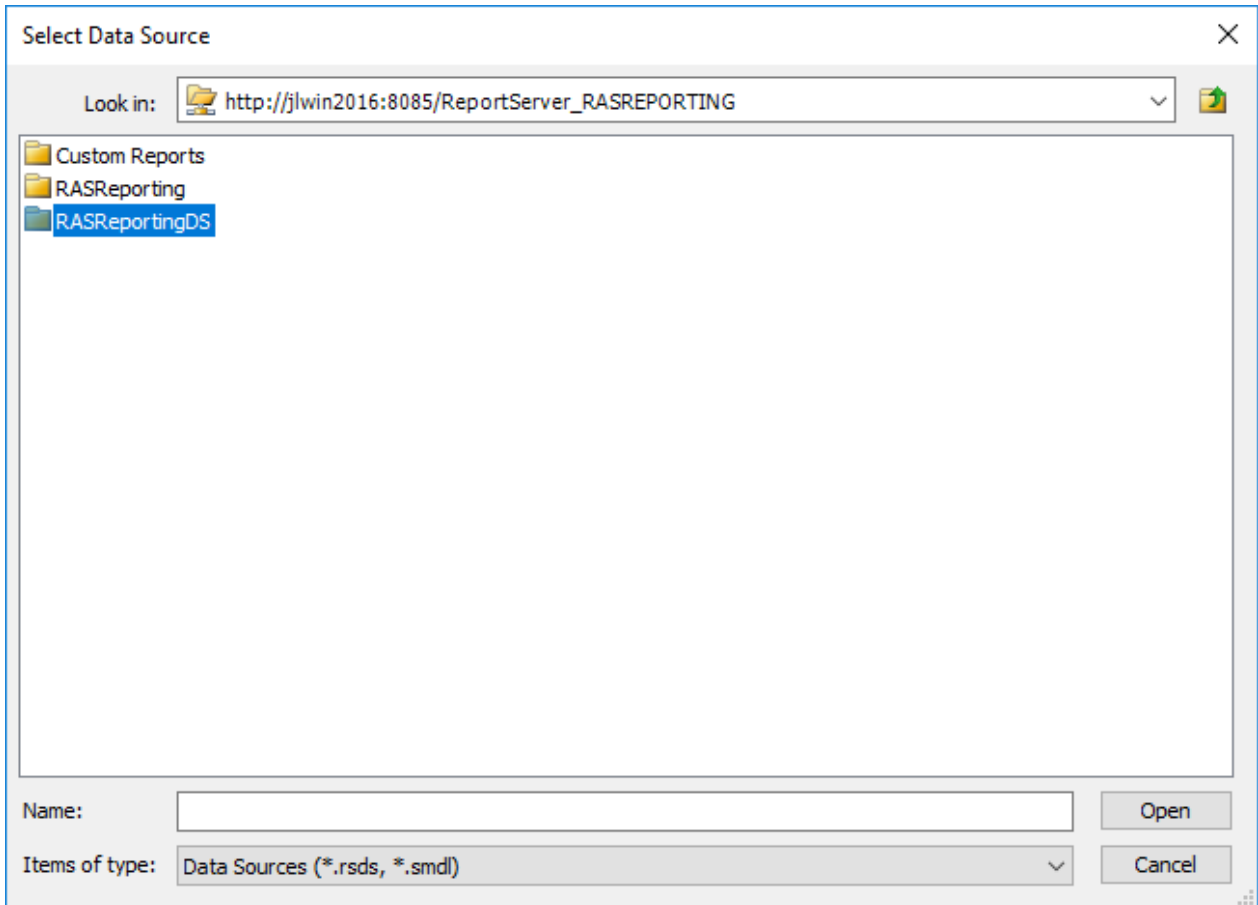

- Double-click the **RASReportingDS** folder and select the **dsReporting** object. Click **Open**.
- The **dsReporting** object should now appear in the list in the **Data Source Properties** dialog.
- Click the **Test Connection** button. If the connection is successful, you should see a confirmation message.
- Click **OK** to close the **Data Source Properties** dialog.

Add a Dataset

The next step is adding a data set, which will contain a SQL query that will retrieve the report data from the database.

To create a dataset:

- In the Report Builder, right-click the **Datasets** folder in the left pane and then click **Add Dataset**.

- 2 In the **Dataset Properties** dialog, type a data set name and then select the **Use a dataset embedded in my report** option.

Dataset Properties

Choose a data source and create a query.

Name:
DataSet1

☐ Use a shared dataset.
☒ Use a dataset embedded in my report.

Data source:
RASReporting New...

Query type:
☒ Text ☐ Table ☐ Stored Procedure

Query:

```
select *
from dbo.ComponentsConnections
where ConnectedMachine_fk = '4294967297'
```

Query Designer... Import... Refresh Fields

Time out (in seconds):
0

Help OK Cancel

- 3 In the **Data source** field, select the data source that you created earlier (p. 18).
- 4 In the **Query type** section, select **Text** to use an embedded SQL as your query and enter the sample query as shown on the screenshot above.
- 5 To test the query, click the **Query Designer** button. In the dialog that opens, click the exclamation sign icon (at the top) to run it. If the query is valid, you will see the result set.
- 6 Close the **Query Designer** dialog and then click **OK** to save the dataset.

Note: When you are ready to create queries for your own custom reports, please refer to **RAS Reporting Database Schema** (p. 46).


Design the Report

After adding a data set, you can design the visual representation of your report.

Report Builder gives you many options of how the data can be represented on a report. You can use tables, lists, matrices, charts, etc. You can also insert text boxes, lines, images, and other graphics. In this tutorial, we will create a simple report that displays the data in a table format.

To insert a table into the report:

- 1 In Report Builder, make sure you have the main design view displayed.
- 2 Right-click in the report's empty space and then click **Insert > Table**.

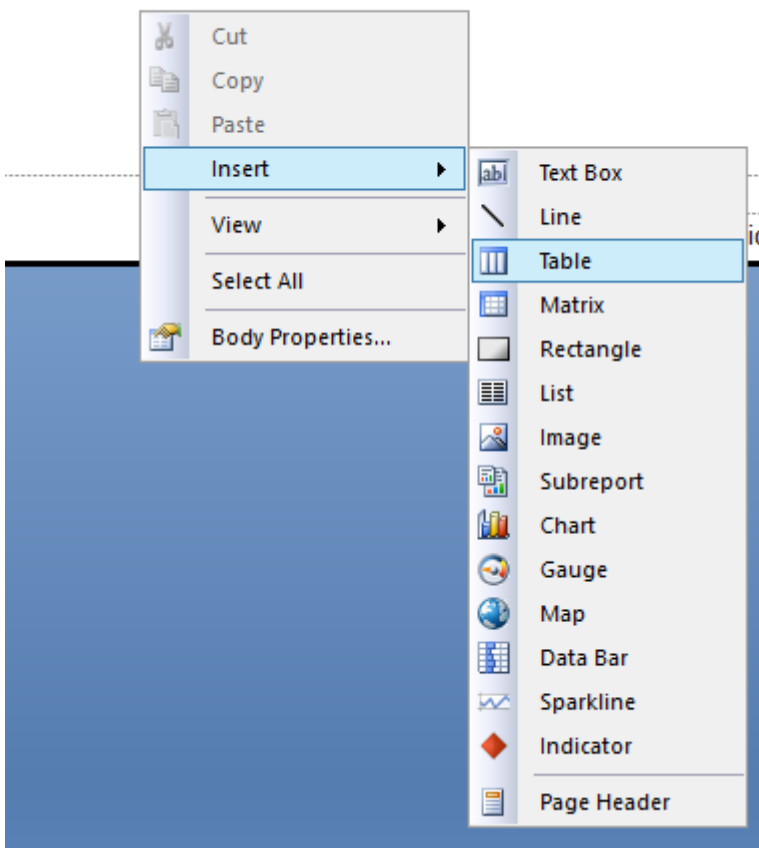

- 3 Expand the **Datasets** folder in the left pane and then expand your data set, so you can see the fields included in the set.

- 4 Drag a data field to a desired column in the table. Repeat for other fields.

Custom Report

PA_fk	Started	Ended
[PA_fk]	[Started]	[Ended]


[&ExecutionTime]

To test the report, click **Run** or press F5. To return back to the designer, click **Design**.

When you are satisfied with how your report looks in the Report Builder, you can save it in the database as follows:

- 1 In Report Builder, click **File > Save As**.
- 2 In the **Save As Report** dialog, select your report server URL in the drop-down list at the top of the dialog.

- 3 Double-click the **Custom reports** folder, type a name for your report and click **Save**.

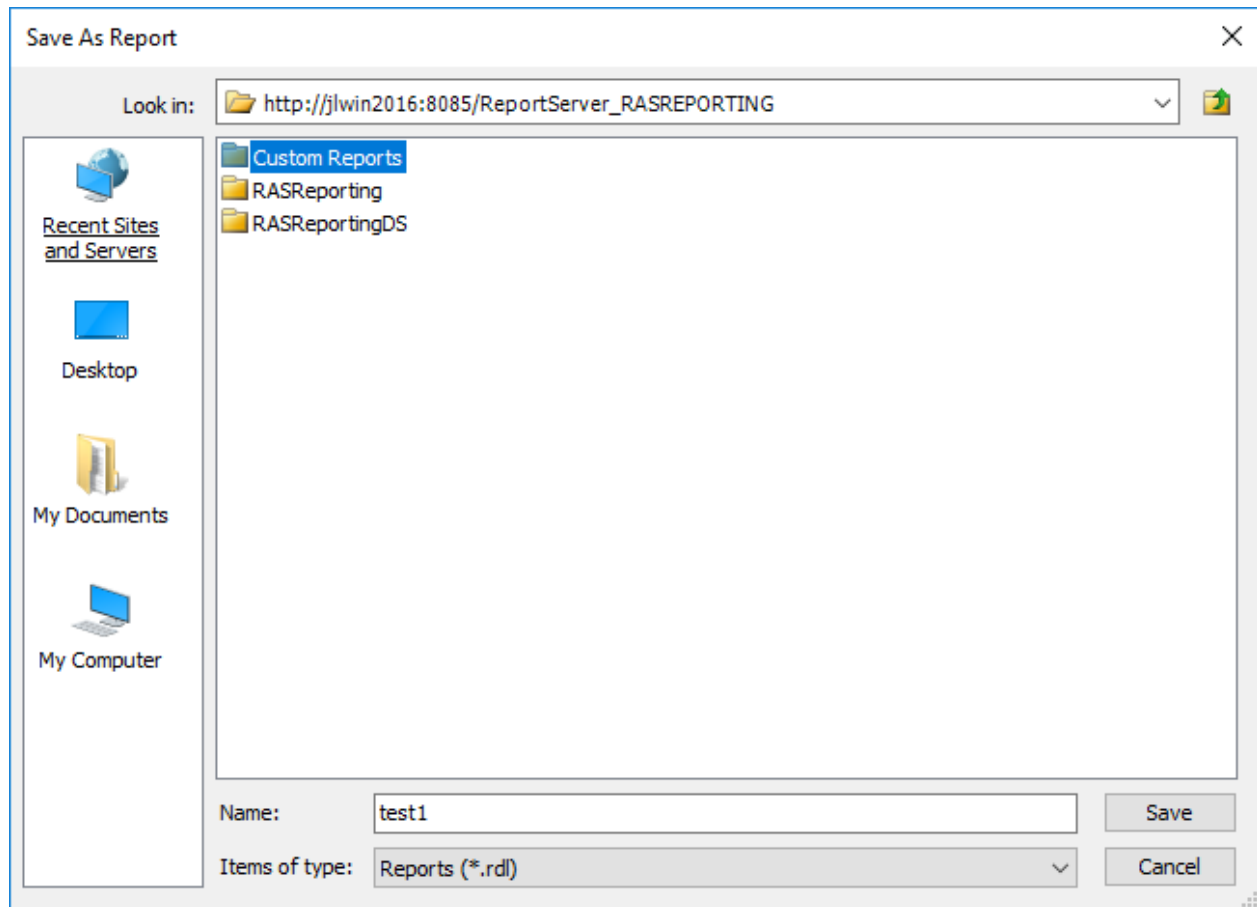


Note: You can create sub folders to section the reports as you like. To set a particular order for your reports, you can add numbering to the report name in form of #####.REPORT_NAME, such as: '0001.My Custom Report'. This can also be used with subfolder names.

Run the Report in the RAS Console

To run the report in the RAS Console:

- 1 Open the **Reporting** category.
- 2 Click the "refresh" icon at the top of the **Reports** list (middle pane).
- 3 Your new report should appear in the **Custom reports** folder.

- 4 Double-click the report to run it. The report will be displayed in the right pane.

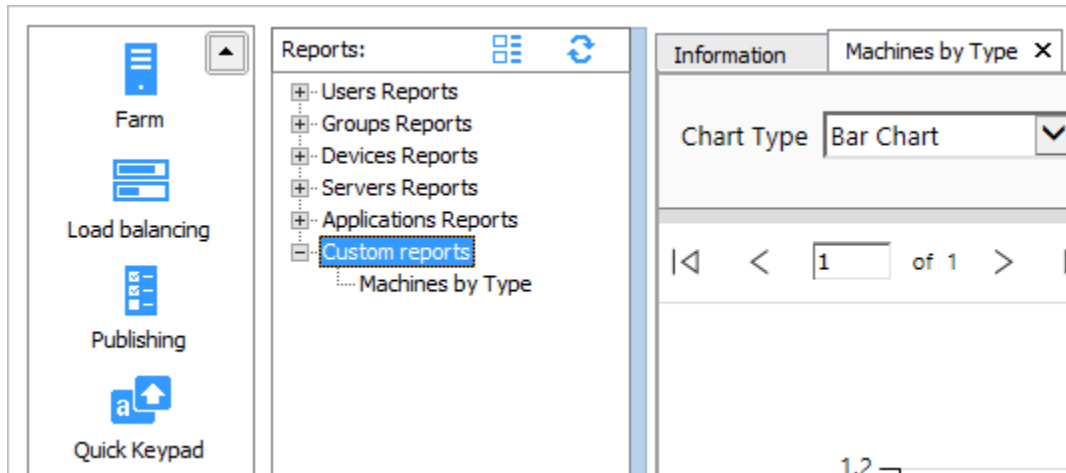

Summary

In this chapter, we've demonstrated how to:

- Enable custom reports in the Parallels RAS Console.
- Create a report using the SQL Server Report Builder.
- Use a simple query to retrieve data from the Parallels RAS reporting database.
- Design the report and save it in the database.
- Run the report in the Parallels RAS Console.

The above covers the essentials of the Parallels RAS reporting functionality, so you can start creating your own reports at any time.

In the next section, we'll create a more advanced sample report that uses charts, expressions, and other features of Microsoft SQL Server Report Builder.

Example: Report with Charts

This section describes how to create a report that uses charts and advanced techniques to display the information about servers in the farm, grouped by server type.

This is the sample report that is installed by default when you enable the Custom Reports functionality in the RAS Console. The following sections describe how to create this report.

Create a New Report

To begin, open Microsoft SQL Server Report Builder, connect to the report server, create a new report, and add a data source. These steps are the same as described in the previous section. See **Create a New Blank Report** (p. 16) and **Add a Data Source** (p. 18) sections.

Add a Dataset

Add a dataset as follows:

- 1 In the Report Builder, right-click the **Datasets** folder in the left pane and then click **Add Dataset**.
- 2 In the **Dataset Properties** dialog, type a data set name and then select the **Use a dataset embedded in my report** option.
- 3 In the **Data source** field, select the data source that you created earlier.
- 4 In the **Query type** section, select **Text** to use an embedded SQL as your query.
- 5 Enter the following query into the **Query** edit box:

```
SELECT
    m.Name as [Machine Name],
    mt.MachineType as [Machine Type],
    mt.SortingID as [SortingID]
FROM
    dbo.Machines m RIGHT OUTER JOIN
    dbo.MachineType mt ON mt.MachineType_ID = m.MachineType_fk
```

- 6 To test the query, click the **Query Designer** button. In the dialog that opens, click the exclamation sign icon (at the top) to run it. If the query is valid, you will see the result set.
- 7 Close the **Query Designer** dialog and then click **OK** to save the dataset.

Design the Report


First, we'll add a report title and some standard built-in fields like page numbers.

To add a title, simply type it in the field at the top of the report area.

To add page numbers:

- 1 Delete the [&ExecutionTime] field from the report footer. We'll replace it with the page number field.

- 2 Select the **Text Box** item on the ribbon and then click at the desired position on the page footer to insert the text box. Move the box as needed.
- 3 Expand the **Built-in Fields** folder in the left pane, select the **Page Number** field and drag it to the text box.

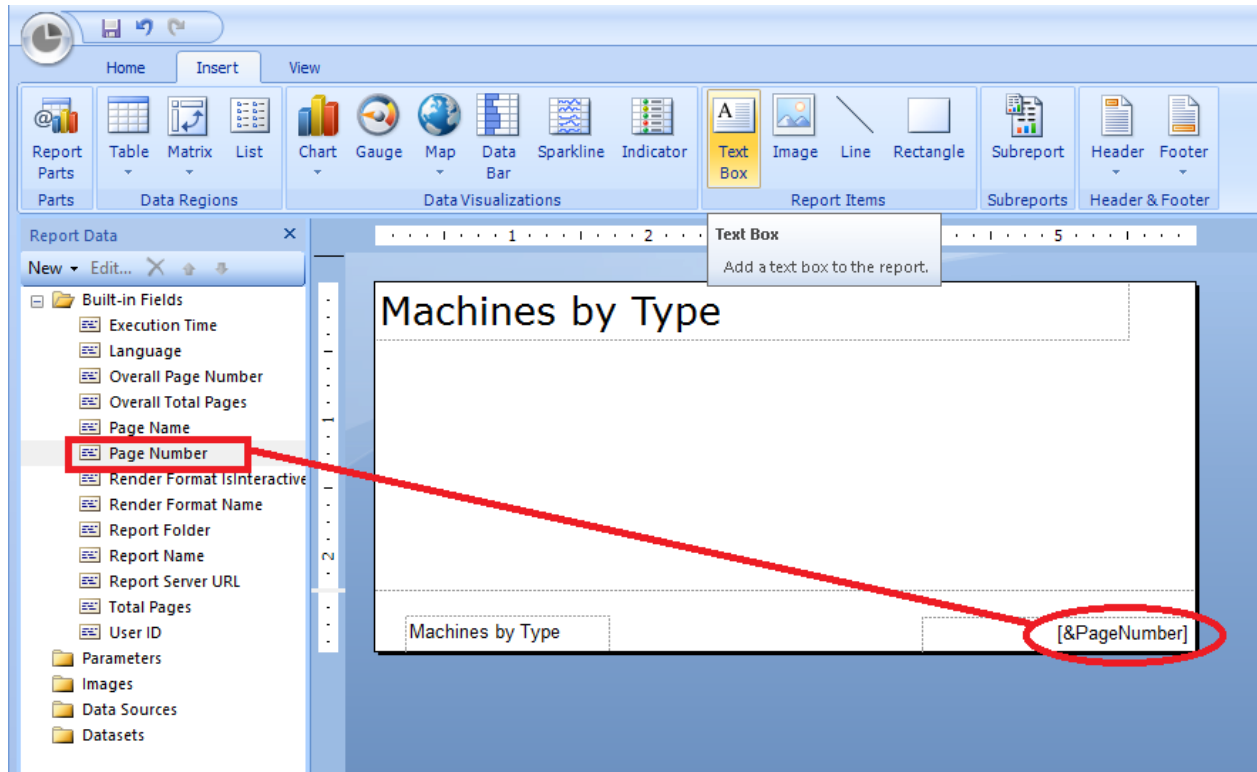


Add a Bar Chart

We will now add a bar chart that will illustrate the "machines by type" information.


To add a chart:

- 1 On the main menu, click **Insert > Chart > Insert Chart** and then click in the middle of the main report area.

- 2 In the **Select Chart Type** dialog that opens, select the first item in the **Column** section and click **OK**.

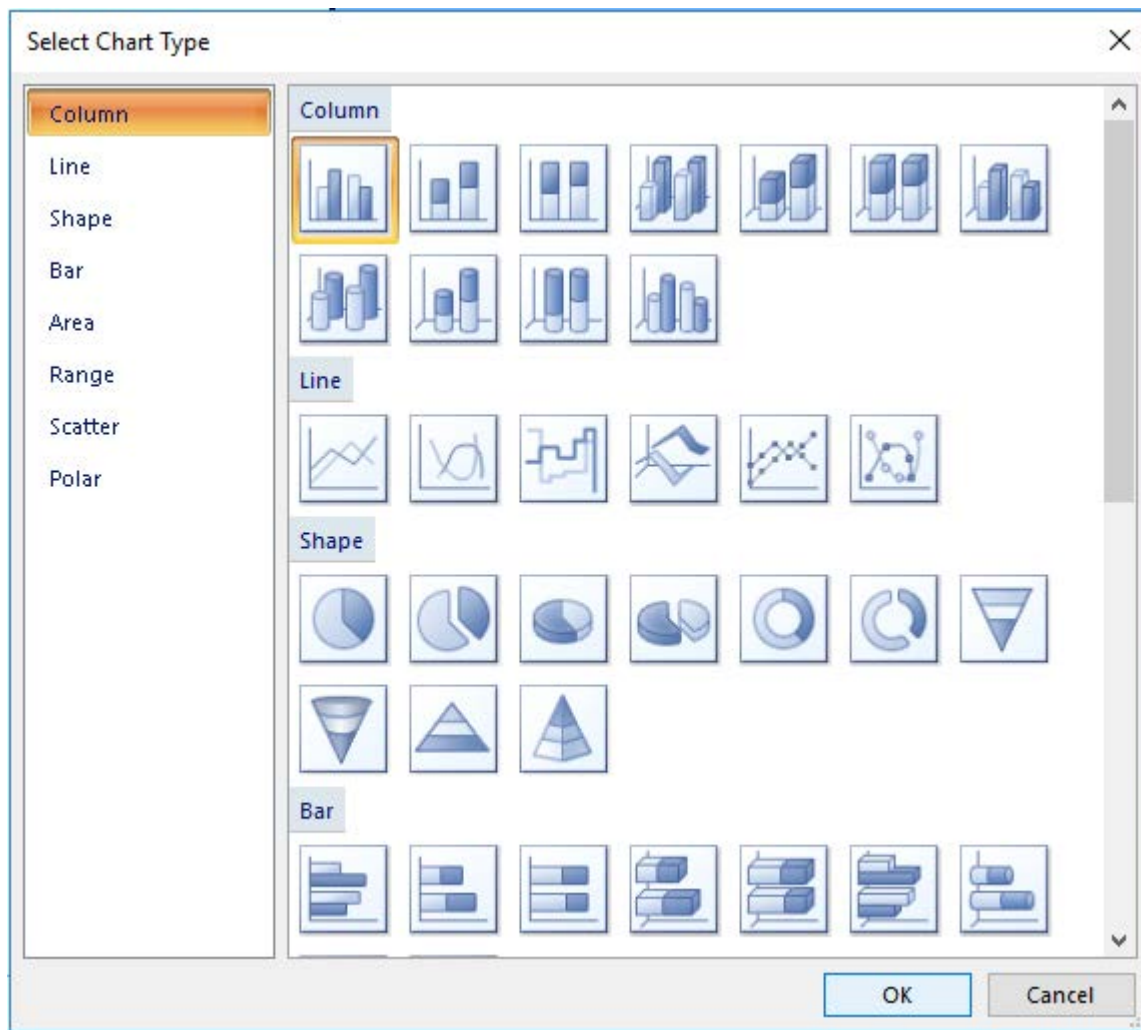


Double click on the chart and then delete the **Details** group from the **Category Groups** section by right-clicking it and choosing **Delete Category Group**.

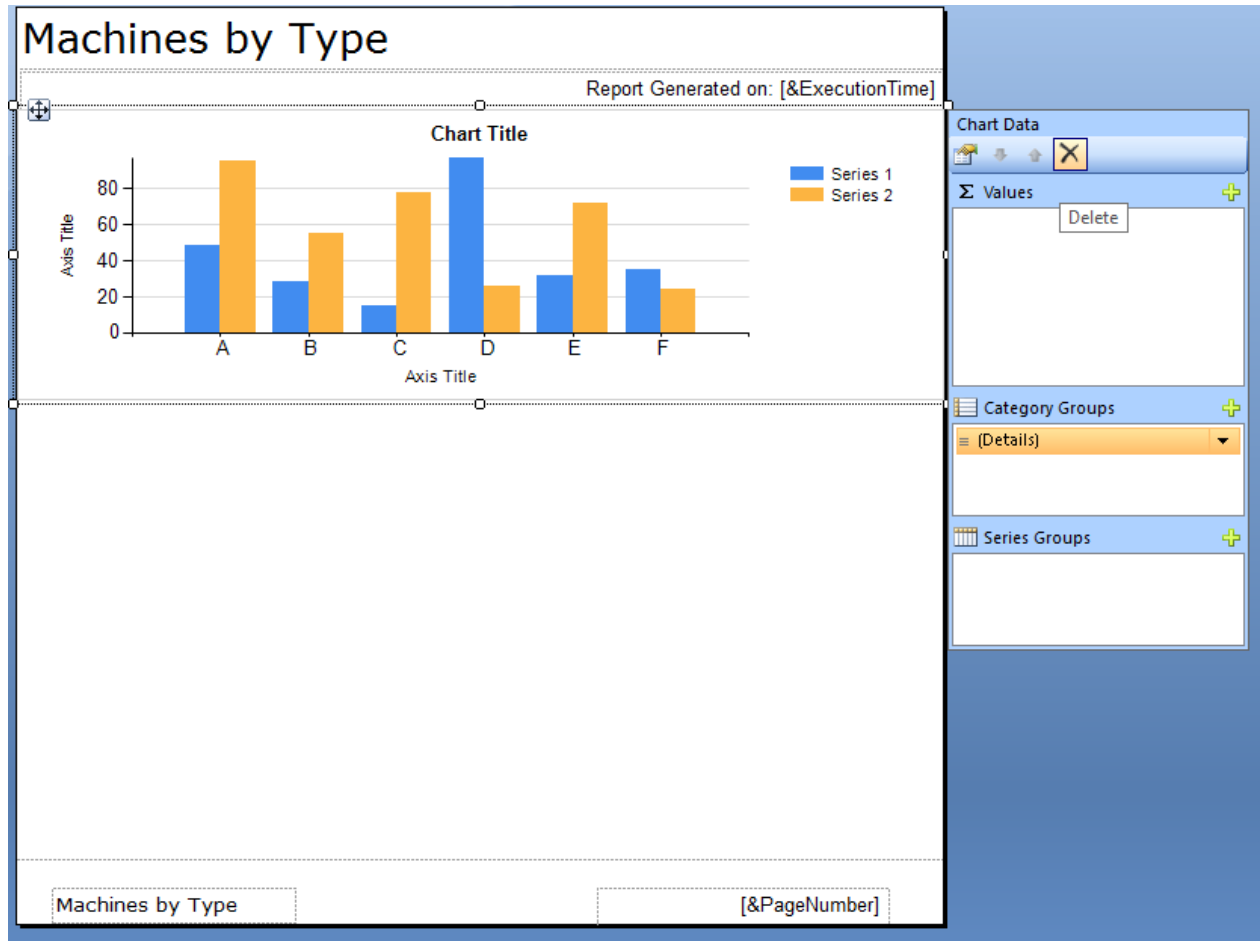


Now do the following:

- 1 Double-click the chart header and type **Summary** as the title.
- 2 Add the **Machine_Name** field to the **Values** section by clicking the green plus-sign icon.
- 3 Add the **Machine_Type** field to the **Series Groups** section.

- 4 Click on the arrow on the **Machine_Type** row and choose **Series Group Properties**.

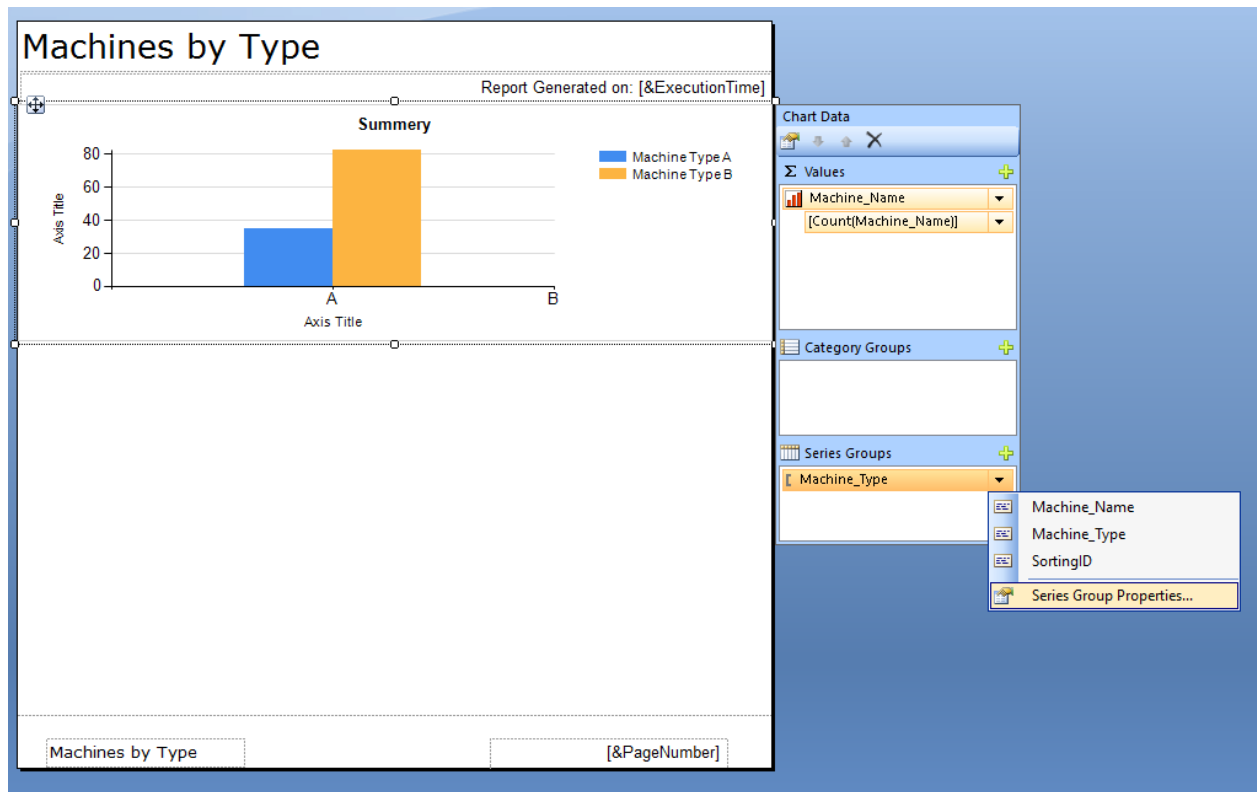

In the **Series Group Properties** dialog, select the **Sorting** tab and set the **Sort by** field to **[SortingID]**. Click **OK**.

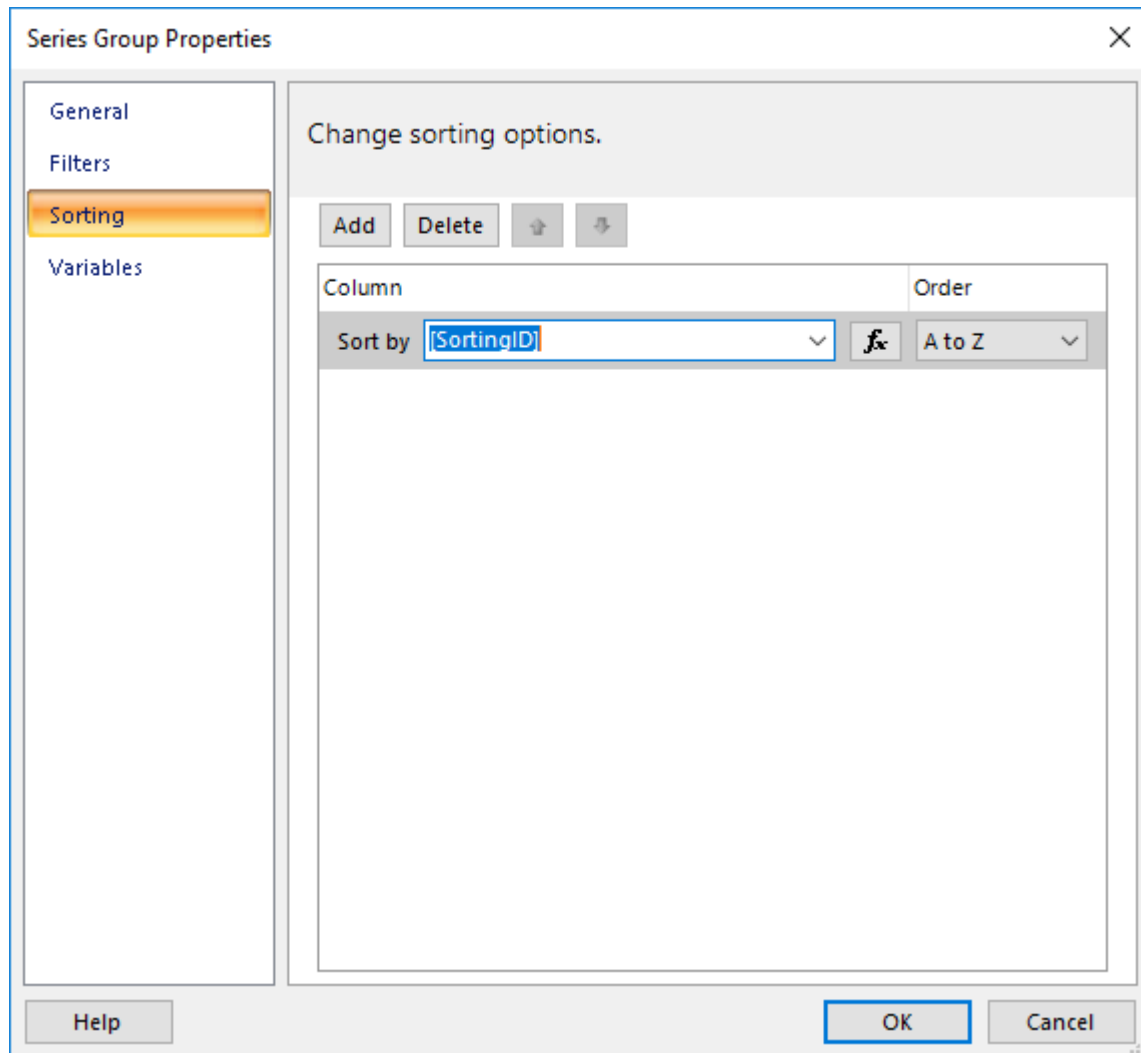


Add a Pie Chart

We'll now add a pie chart that will show the server information. Once again, click **Insert > Chart** and choose the pie shape.

On the main report screen, do the following:


- Change the chart title to **Summary**.
- Add **Machine_Name** to **Values**.
- Add **Machine_Type** to **Category Groups**.

- Expand the **Machines_Type** drop-down list and choose **Category Group Properties**.

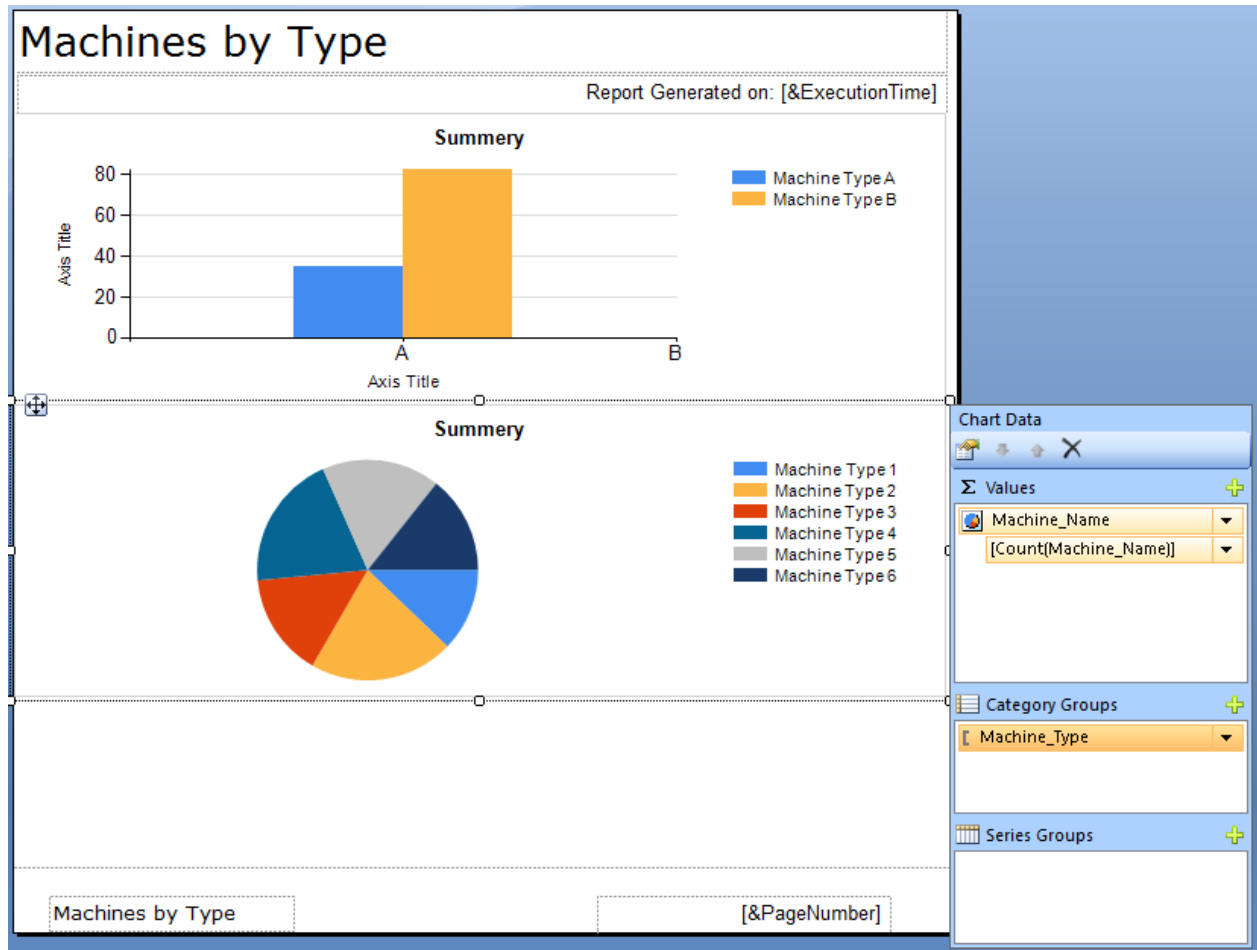


Select the **Sorting** tab and set the **Sort by** field to **SortingID**. Click **OK**.


Click **Insert** > **Matrix**:

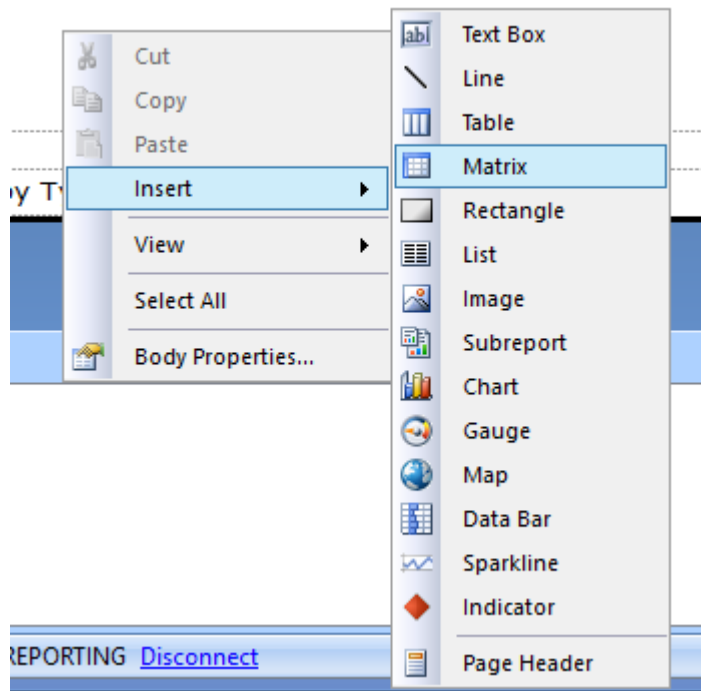


Drag and drop **Machine_Name**. Remove the existing **Machine_Name** (highlighted in blue on the screenshot below):

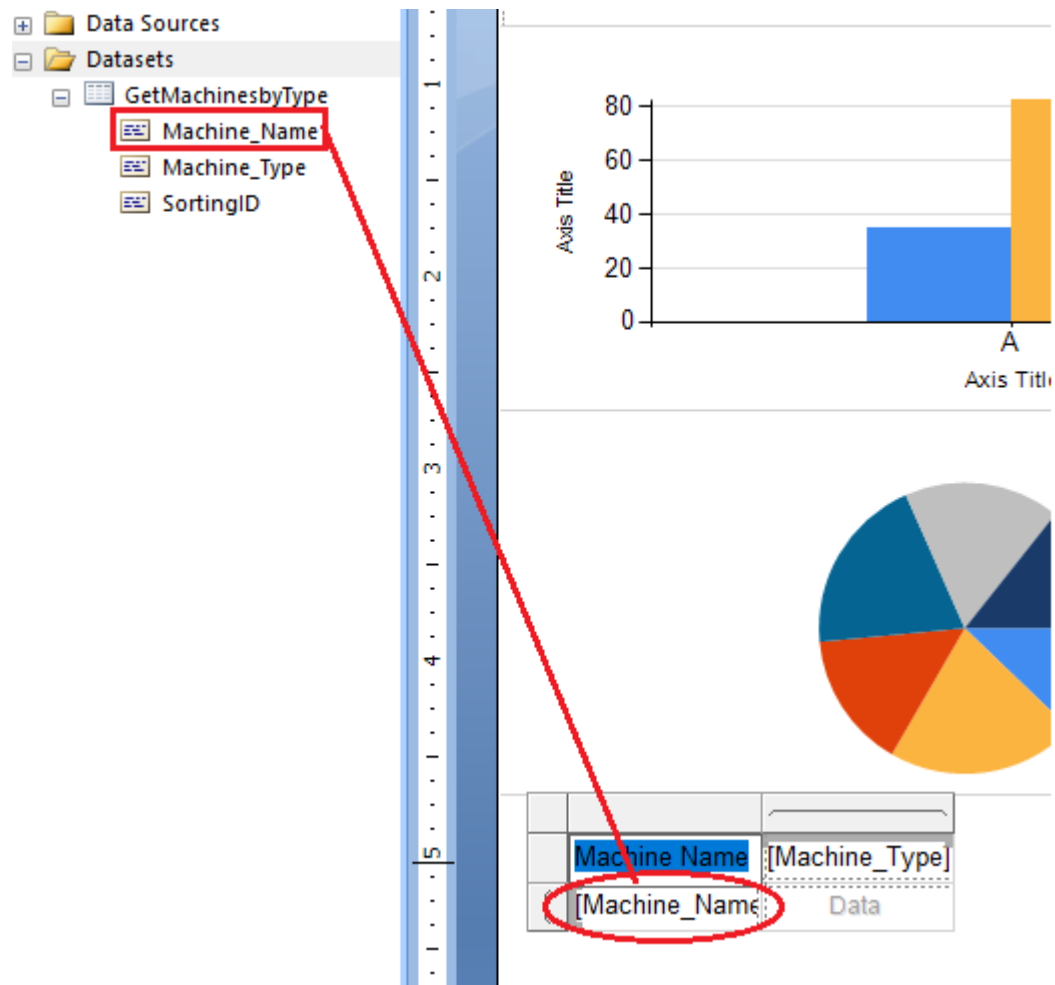

Drag and drop **Machine_Type**:

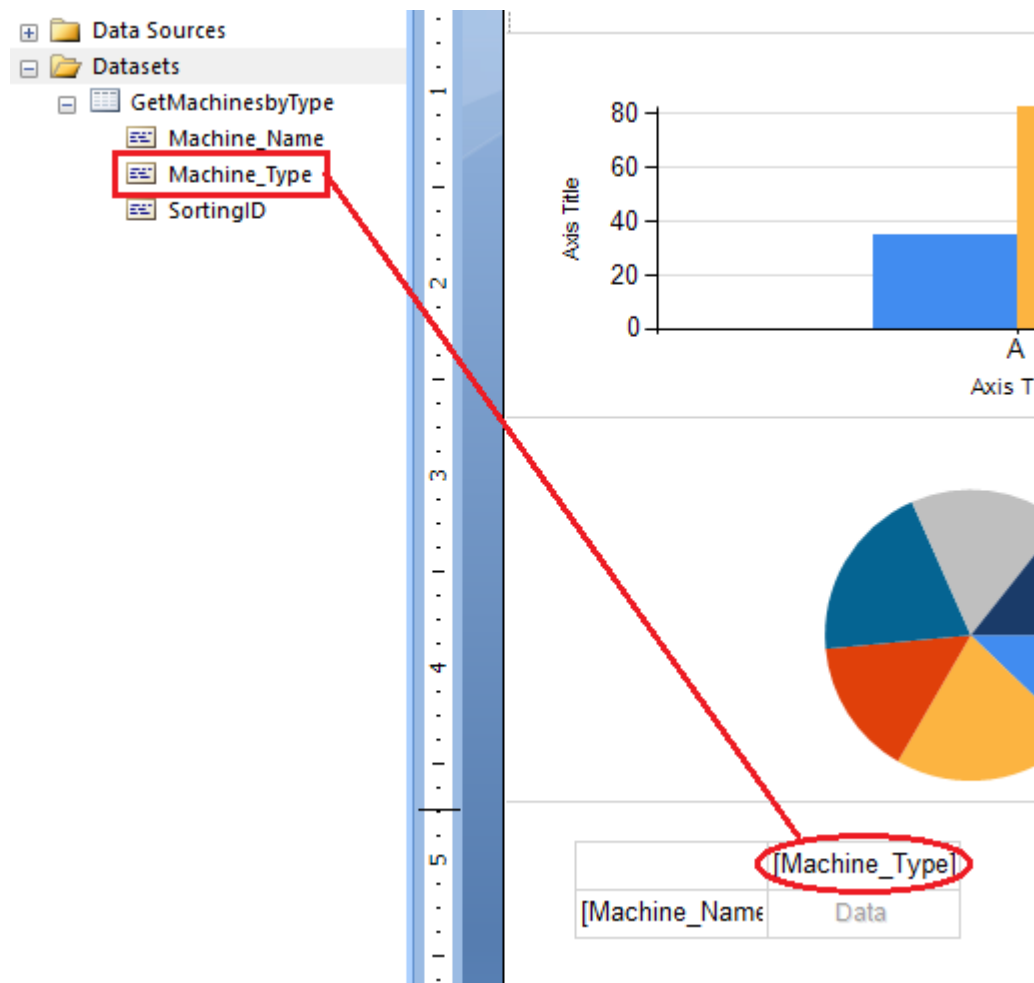

Right-click on the **Data** box and choose **Select > Image**:

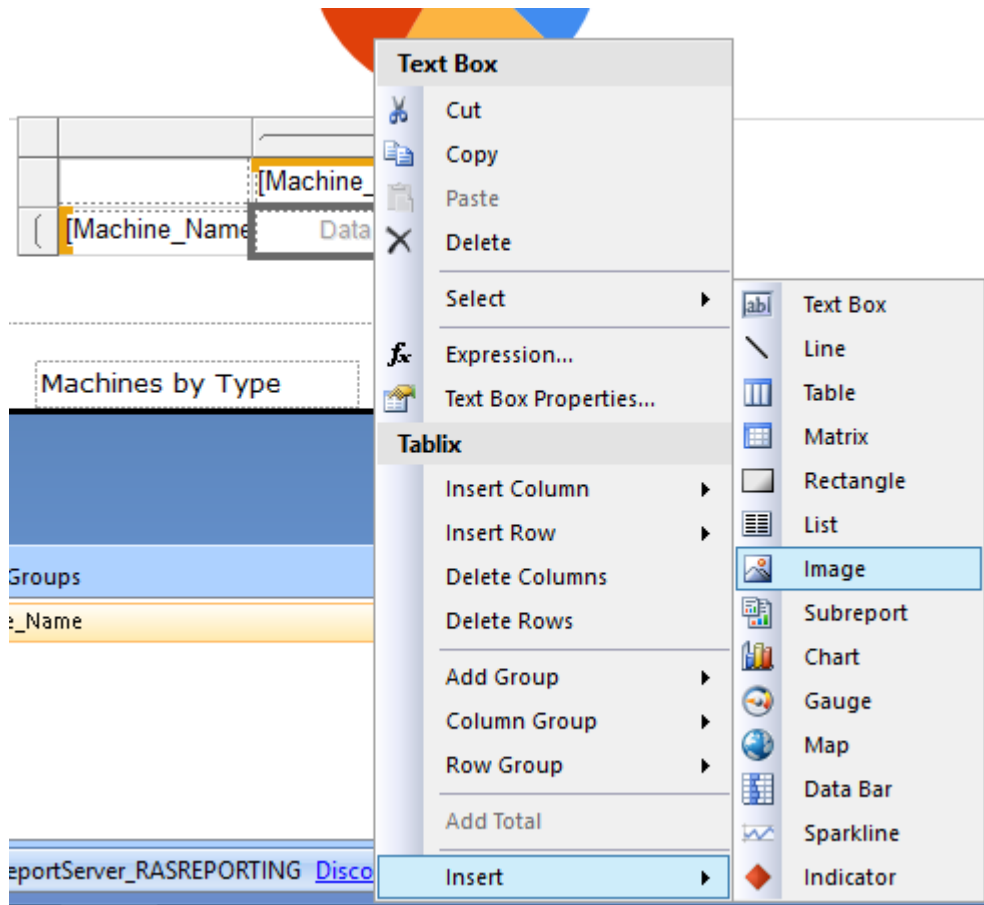


In the **Image Properties** dialog:

- 1 Name the image.
- 2 Make sure that **Embedded** is selected in the **Select the image source** field.
- 3 Click the **Import** button and select an image.
- 4 Click **OK**.

Format the Report

We'll now add some formatting to our report.

Right-click in the indicated area (see the screenshot below) and choose **Row Visibility**.

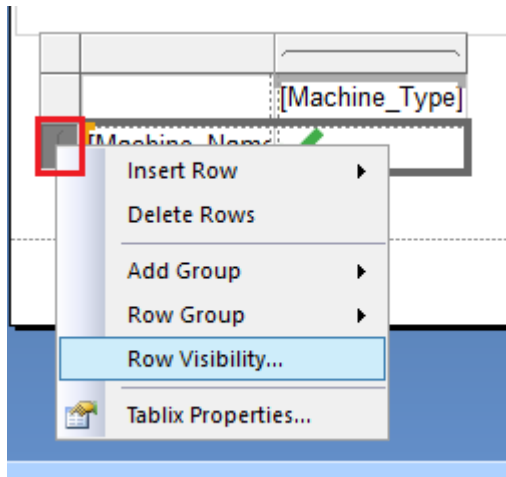


In the **Row Visibility** dialog, select the **Show or hide based on an expressions** option and then click the **Fx** button (on the right). In the **Expression** dialog that opens, enter the following expression:

```
=If(IsNothing(Fields!Machine_Name.Value <> Fields!Machine_Type.Value,  
false, true)
```

The expression will hide the empty machine names.

Right-click on the image and select **Image Properties**. In the **Image Properties** dialog, set padding to position the image in the center:

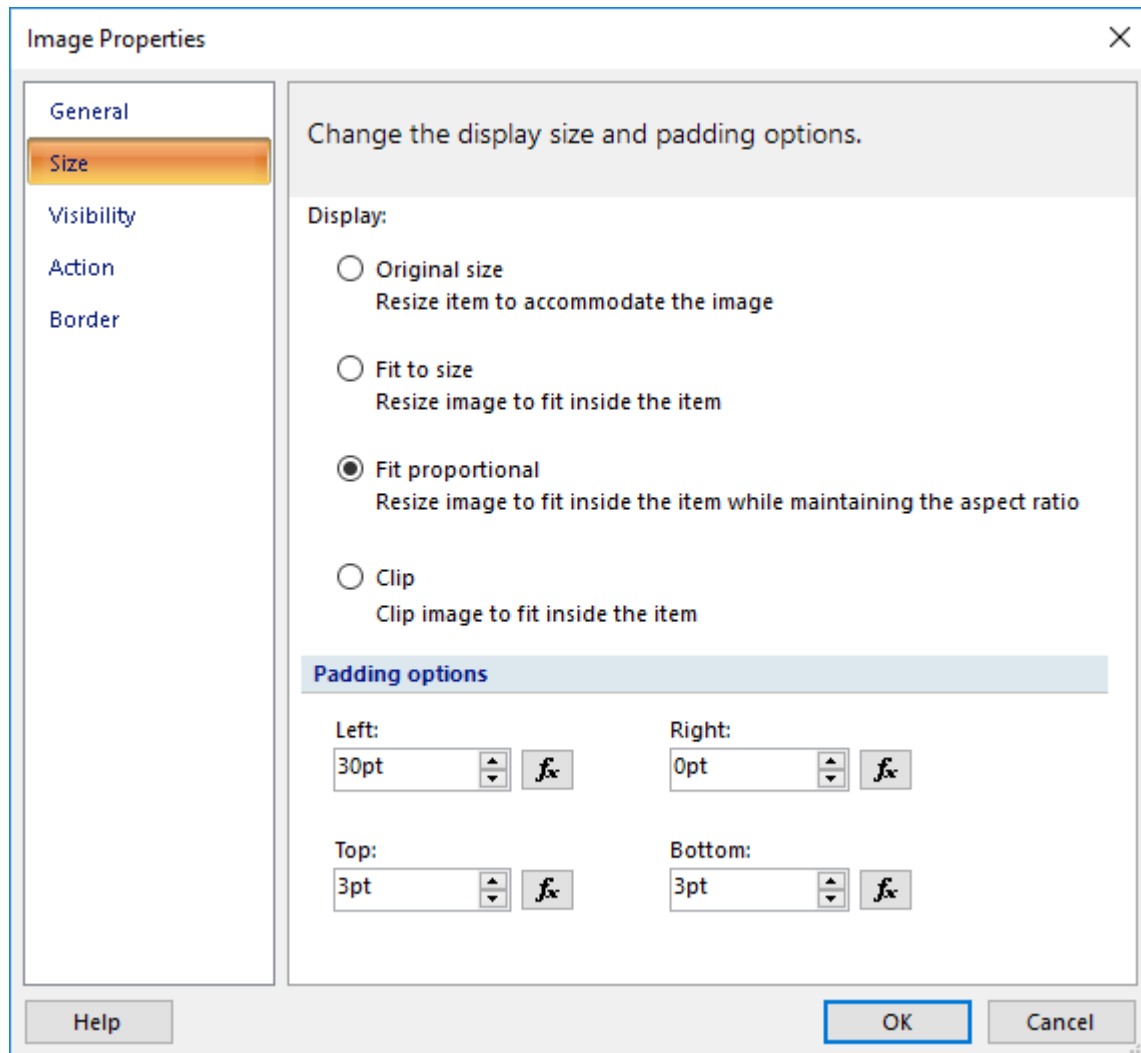

In the **Visibility** tab, select **Show or hide based on an expression** and click the **Fx** button. Enter the expression as shown below:

Expression


Set expression for: Hidden

=IIf(Fields!Machine_Name.Value <>Fields!Machine_Type.Value, false,true)


Category:	Item:	Values:
Constants	<All>	True
Built-in Fields		False
Parameters		
Fields (GetMachinesbyType)		
Datasets		
Variables		
Operators		
Common Functions		

Help OK Cancel

Right-click on **Parameters** and choose **Add Parameter**:

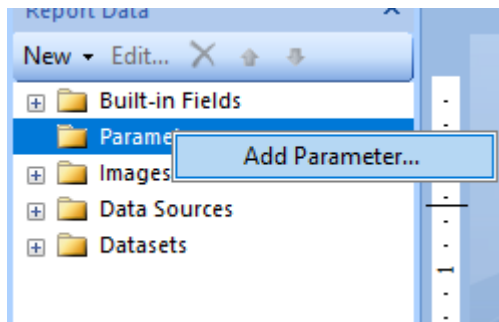


Set the parameter name and the prompt:

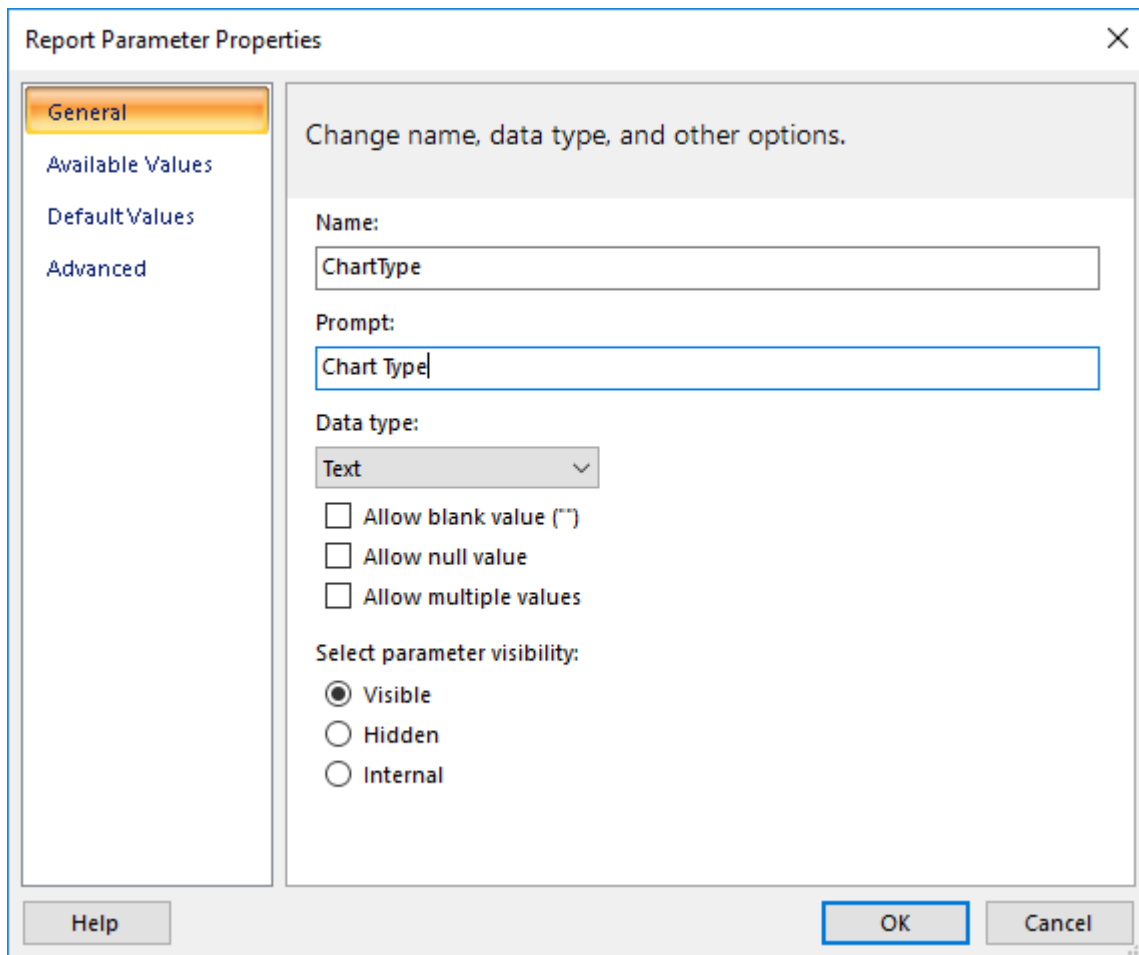A screenshot of the 'Report Parameter Properties' dialog box. The 'General' tab is selected in the left-hand sidebar. The main area contains the following fields and options:

- Name:** A text box containing 'ChartType'.
- Prompt:** A text box containing 'Chart Type'.
- Data type:** A dropdown menu set to 'Text'.
- Allow blank value (""):** An unchecked checkbox.
- Allow null value:** An unchecked checkbox.
- Allow multiple values:** An unchecked checkbox.
- Select parameter visibility:** Three radio buttons: 'Visible' (selected), 'Hidden', and 'Internal'.

At the bottom of the dialog are 'Help', 'OK', and 'Cancel' buttons.

In the **Available Values** tab, select **Specify values** and add the required labels:

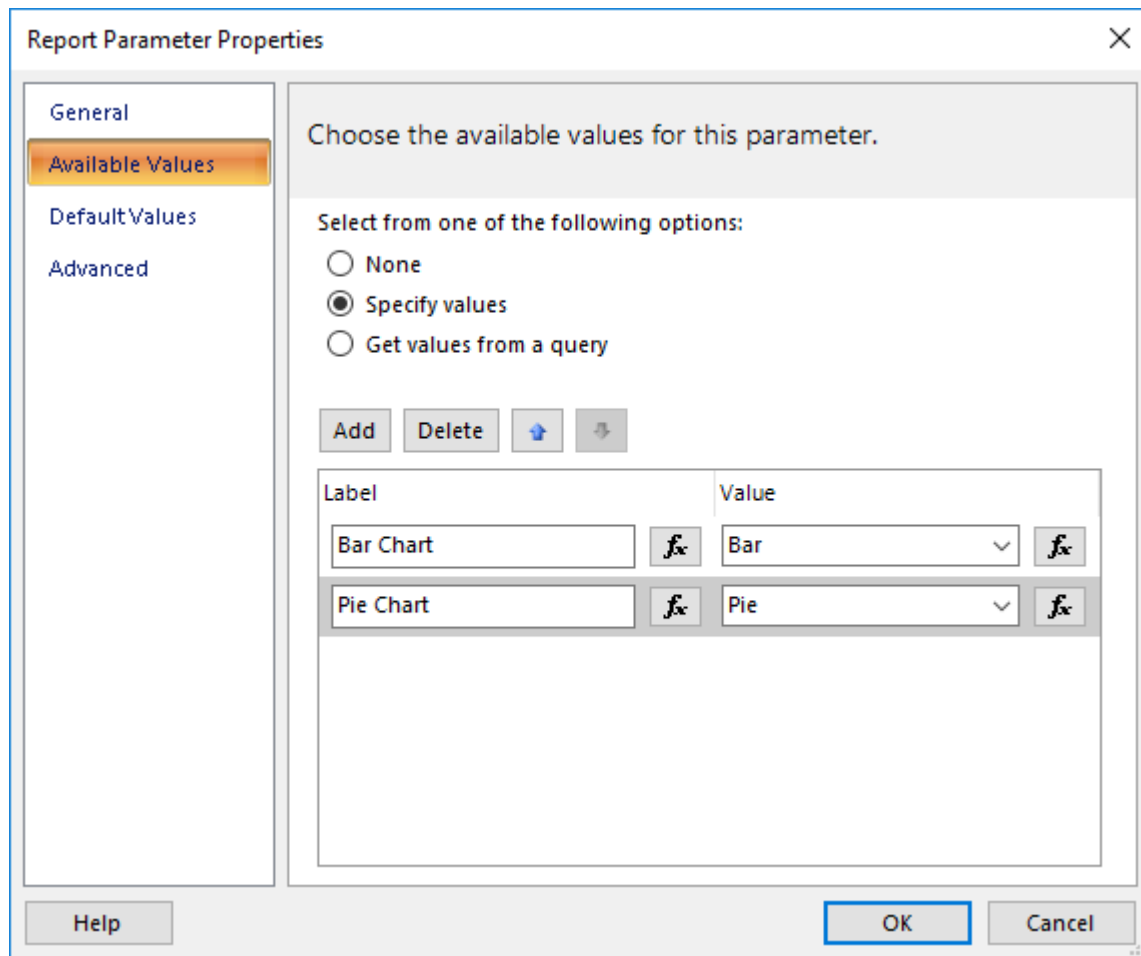

The image shows the 'Report Parameter Properties' dialog box with the 'Available Values' tab selected. The 'Specify values' radio button is chosen. Below the options are buttons for 'Add', 'Delete', and up/down arrows. A table lists two entries: 'Bar Chart' with value 'Bar' and 'Pie Chart' with value 'Pie'. Each entry has a formula icon (fx) to its right. The 'OK' button is highlighted with a blue border.

Report Parameter Properties

General
Available Values
Default Values
Advanced

Choose the available values for this parameter.

Select from one of the following options:


☐ None
☒ Specify values
☐ Get values from a query

Add Delete ↑ ↓

Label		Value	
Bar Chart	fx	Bar	fx
Pie Chart	fx	Pie	fx

Help OK Cancel

In the **Default Values** tab, set a default value from the previous list:

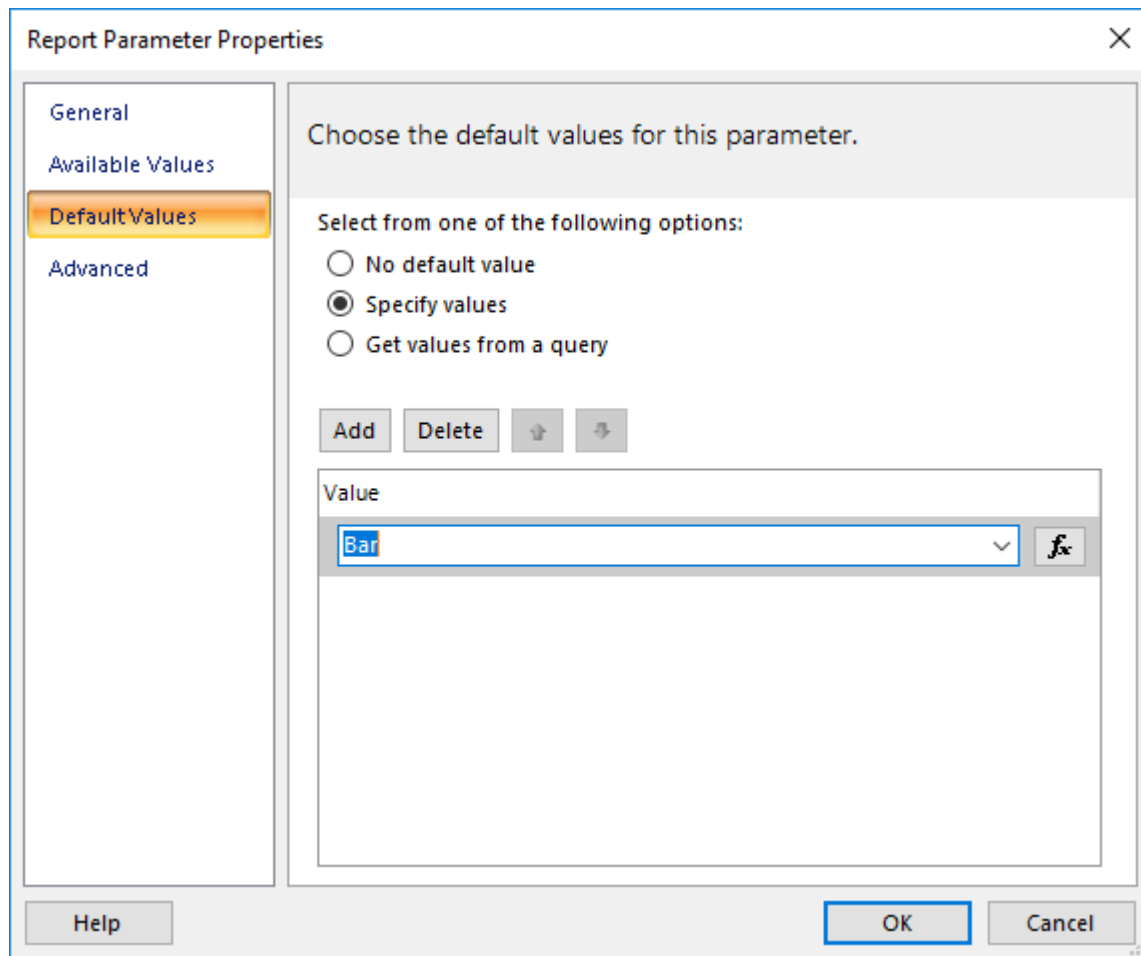

The image shows a 'Report Parameter Properties' dialog box with the 'Default Values' tab selected. The dialog has a sidebar on the left with four tabs: 'General', 'Available Values', 'Default Values' (which is highlighted with an orange background), and 'Advanced'. The main area of the dialog is titled 'Choose the default values for this parameter.' and contains three radio button options: 'No default value', 'Specify values' (which is selected), and 'Get values from a query'. Below these options are four buttons: 'Add', 'Delete', and two arrow buttons for moving items between lists. A 'Value' section contains a text box with the word 'Bar' and a dropdown arrow, and a formula icon (fx) to its right. At the bottom of the dialog are three buttons: 'Help', 'OK', and 'Cancel'.

Report Parameter Properties

General
Available Values
Default Values
Advanced

Choose the default values for this parameter.

Select from one of the following options:

- ☐ No default value
- ☒ Specify values
- ☐ Get values from a query

Add Delete ↕ ↕

Value

Bar

OK Cancel

On the main report screen, right-click on the pie chart and select **Chart Properties**. In the **Chart Properties** dialog, select **Show or hide based on an expression** and click the **Fx** button. In the **Expression** dialog, enter the following:

Expression

Set expression for: Hidden

=IIF(Parameters!ChartType.Value="Pie",false,true)

Category:

- Constants
- Built-in Fields
- Parameters
- Fields
- Datasets
- Variables
- Operators
- Common Functions

Item:

<All>

Values:

True

False

Help OK Cancel

On the main report screen, right-click on the bar chart and select **Chart Properties**. In the **Chart Properties** dialog, select **Show or hide based on an expression** and click the **Fx** button. In the **Expression** dialog, enter the following:

Expression

Set expression for: Hidden

=IIf(Parameters!ChartType.Value="Bar",false,true)

Category:

- Constants
- Built-in Fields
- Parameters
- Fields
- Datasets
- Variables
- Operators
- Common Functions
 - Text
 - Date & Time
 - Math
 - Inspection
 - Program Flow
 - Aggregate
 - Financial
 - Conversion
 - Miscellaneous

Item:


<All>

Values:

ChartType

Help OK Cancel

Save the report. You can now run it in the Parallels RAS Console:

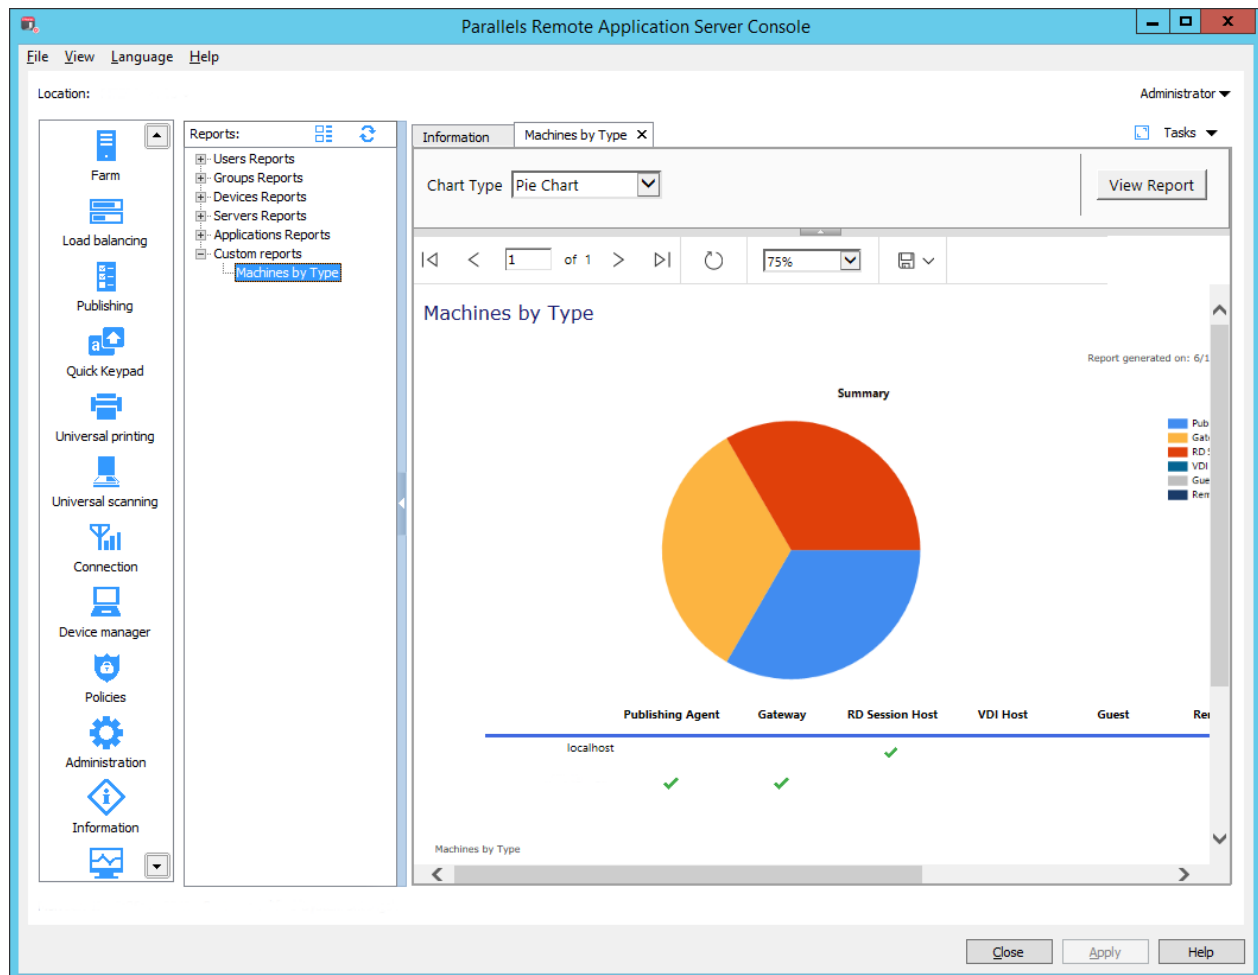

CHAPTER 4

RAS Reporting Database Schema

The table below describes the RAS Reporting database schema.

To see the visual representation of the schema, please use the following link:
https://kb.parallels.com/Attachments/kcs-171407/DB_relations_Diagram.jpg

Database schema

Table Name	Description
ApplicationConnections	Contains names and IDs of applications that were used in sessions. The table is linked to the RDSession table that contains session information.
ComponentsConnections	This table is used in conjunction with the PublishingAgentConnections table. When a machine is connected, it is connected to a Publishing Agent. This table links a machine to a Publishing Agent.
DBUpgradeHistory	Contains all upgrade versions of the database.
Devices	Contains information about devices that were used to connect to Parallels RAS.
Disconnections	Contains the disconnected time of every connection.
Farms	Contains the farm information.
Gateways	This table is linked to the GatewayTypes table and shows all gateways and their types.
GatewayTunnelledConnections	This table is linked to the Gateways table and shows the number of connections going through the gateway.
GatewayTypes	Defines gateway types (Normal, Forwarding, Unknown).
Groups	This table contains all groups.
Guests	Keeps record of the guest VMs that are connected and to which VDI they belong. This table is NOT used in any queries.
HostTypes	Contains all host types used in the VDIHost table.
IdleConnections	Contains the idle time of every connection.
Machines	Stores information about all servers that are connected to the farm. This includes Terminal Servers (TS), Publishing Agents (PA), Gateways (GW), RemotePCs (RPC), VDI hosts (VDIH) and VDI Guests (VDIG).
MachineStateLogs	Keeps a record of various states the machine has been in. For the complete list of states, check the MachineStates table.
MachineStates	Contains all machine states used in the MachineStateLogs table.

MachineType	Defines machine types used in the Machines table.
Members	This table is used in conjunction with tables Groups and Users. It allows to see which users belong to which groups.
MemoryHealth	Stores information about the current server memory usage, which is marked by a Timestamp. For detailed information on how to query this table see the queries section.
Notifications	Contains notifications that were displayed in the RAS Console.
ProcessorHealth	Stores information about the current server processors usage, which is marked by a Timestamp. For detailed information on how to query this table see the queries section.
Protocols	Defines the protocols used in the RDSessions table.
PublishingAgentConnections	This table is used to log for how long a Publishing Agent has been active. When a Publishing Agent is still active, the Started and Ended fields are the same. When a disconnect occurs, the Ended column value is updated with the new Timestamp.
RDConnections	This table links with the RDSessions table. A session can have multiple states, one of them is connected to have other two states (Disconnected and Idle) a connection must first be established therefore the other two tables that show these states are in a relationship with RDConnections table.
RDSessions	Stores a list of established sessions by clients, along with the protocol used (Console, or RDP), Session type (Desktop, Published Apps, VDI Apps...), the user that made the session (All users are pre populated in the table), Started and Ended time the connection was running through.
RemotePC	This table is a placeholder and currently has no columns, except the PK column.
SessionTypes	Defines session types for the RDSessions table.
Sites	Contains sites that exist in the farm.
TerminalServers	This table is a placeholder and currently has no columns, except the PK column.
TimeZones	Contains all time zones.
Users	Contains all users logged in.
VDIHost	Keeps record of the VDI hosts and their types. This table is NOT used in any queries.

SQL query example

```

SELECT
    us.Username,
    ac.ApplicationName AS [Application Name],
    COUNT (ac.ApplicationName) AS [NumOf Times Used]
FROM
    dbo.Users us INNER JOIN
    dbo.RDSessions rd ON us.SID = rd.User_fk INNER JOIN
    dbo.ApplicationConnections ac ON ac.Session_fk = rd.Session_ID
GROUP BY
    us.Username,
    ac.ApplicationName

```

Referring to the database schema and the SQL query above, we can see that the query does the following:

- Selects usernames from table `dbo.Users` and gives the "us" alias to the table.
- Since `dbo.Users` is not directly related to `dbo.ApplicationConnections`, it should first join `dbo.RDSessions` using matches on field `SID` from `dbo.Users` and `User_fk` from `dbo.RDSessions`
- After we have joined `dbo.RDSessions` (alias "rd"), which has link to `dbo.ApplicationConnections`, we may also join `ApplicationConnections` itself with alias "ac" and select application names and number of launches from it.

Index

A

- Add a Bar Chart - 27
- Add a Data Source - 18
- Add a Dataset - 20, 26
- Add a Pie Chart - 31

C

- Configure Microsoft SQL Server Reporting Services - 7
- Create a New Blank Report - 16
- Create a New Report - 26
- Creating Custom Reports - 14

D

- Design the Report - 22, 26

E

- Enable Custom Reports in the RAS Console - 15
- Example
 - Report with Charts - 25

F

- Format the Report - 36

G

- GDPR Compliance - 12

I

- Install Microsoft SQL Server - 7
- Install Microsoft SQL Server Report Builder - 16
- Install Parallels RAS Reporting - 8
- Installing Parallels RAS Reporting - 5
- Introduction - 4

P

- Parallels RAS 17 Release History - 4

R

- RAS Reporting Database Schema - 46
- Requirements and Information - 14
- Run the Report in the RAS Console - 24
- Running Parallels RAS Reports - 10

S

- Summary - 25
- System Requirements - 5